


Walraven RapidStrut® Rail X-Connector G2 (BUP1000)

(H28110)

to make Strut rail fabrications

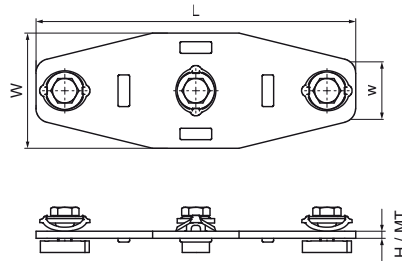

Features & benefits

- connector with pre-assembled Walraven RapidStrut® Slide nut(s)
- to make fabrication with Walraven RapidStrut® Rail
- ready-to-use pre-assembled for a quick fixing, and retains assembly in place before final tightening
- 'Direct Twist' technology for easy and secure installation
- visual guide to check the position of the slide nut
- optimized for easy installation with electrical tools
- material: metal parts made of steel 1.0332; spring(s) made of POM (polyoxymethylene), green
- product is part of the Walraven Walraven UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227

Product Number	NRF Number	For Rail Type	Total Height	Total Width	Total Length	Material Thickness	Width	Torque Moment For Installation	Maximum Allowed Load Faz	Maximum Allowed Load Fax
Reference Letter			H	W	L	MT	w	T _{inst.}	F _{a,z}	F _{a,x}
Unit description			mm	mm	mm	mm	mm	Nm	N	N
665885223	3485228	41x21, 41x41, 41x51, 41x62, 41x82	31.4	80	222	5.00	40	40	4,000	2,270