

Concord

BEACON XXL NB HO 3K L3 BLK 2059307



Features

- 2059307 BEACON XXL NB HO 3K L3 BLK Integrated LED spotlight, black RAL 9005, compact and minimalist design, ideal for double height spaces, retail and display applications, die-cast aluminium body, passive cooling heatsink, beam angle: 21° narrow beam, optics: Fresnel lens for controlled beam, colour temperature: 3000K warm white, total system power: 48W, total fixture output: 4351lm, luminaire efficacy: 91lm/W, LOR: 100%, colour rendering: Ra 85 typical, LED Chromacity: 3 step MacAdam ellipse, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 1200mA, electronic driver, non-dimmable, switched only, power factor: 0.98 electrical protection: CLASS I, 3-circuit track adaptor, suitable for Concord Lytespan 3 track, ingress protection rating: IP20, suitable for internal environment only, horizontal rotation: 355°, vertical tilt: 90°, lockable positioning using Allen key, dimen...

Product Overview


| | |
|----------------------------|----------------------------|
| Product name | BEACON XXL NB HO 3K L3 BLK |
| Technology | LED |
| Cap/Base | N/A |
| Housing | Aluminium |
| Mount | Track mounting |
| Environment | Internal |
| E-number FI | 4278853 |
| E-number SE | 7401267 |
| Fixture luminous flux (lm) | 4351 |
| Luminaire efficacy (lm/W) | 90.65 |
| LOR (%) | 100 |
| Colour temperature (K) | 3000 |
| Light colour | Warm White |
| CRI (Ra) | 85 |

Concord

BEACON XXL NB HO 3K L3 BLK 2059307

| | |
|-----------------------------|--------------------|
| Colour Consistency (SDCM) | 3 |
| Photobiological Risk Group | RG1 |
| Total power consumption (W) | 48 |
| Electrical protection | Class I |
| Control gear type | Electronic ballast |
| Housing colour | Black |
| IP rating | IP20 |
| Product EAN number | 5025768593071 |
| Warranty | 5 years |

Photometry

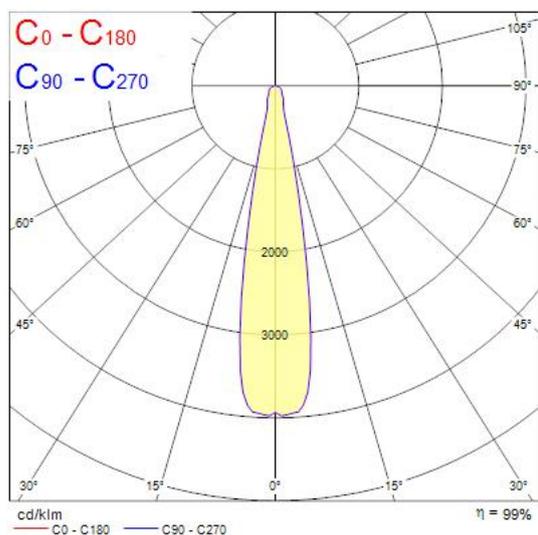

Technical drawings

