


Therm. Überlastrelais / Therm. Overload Relay

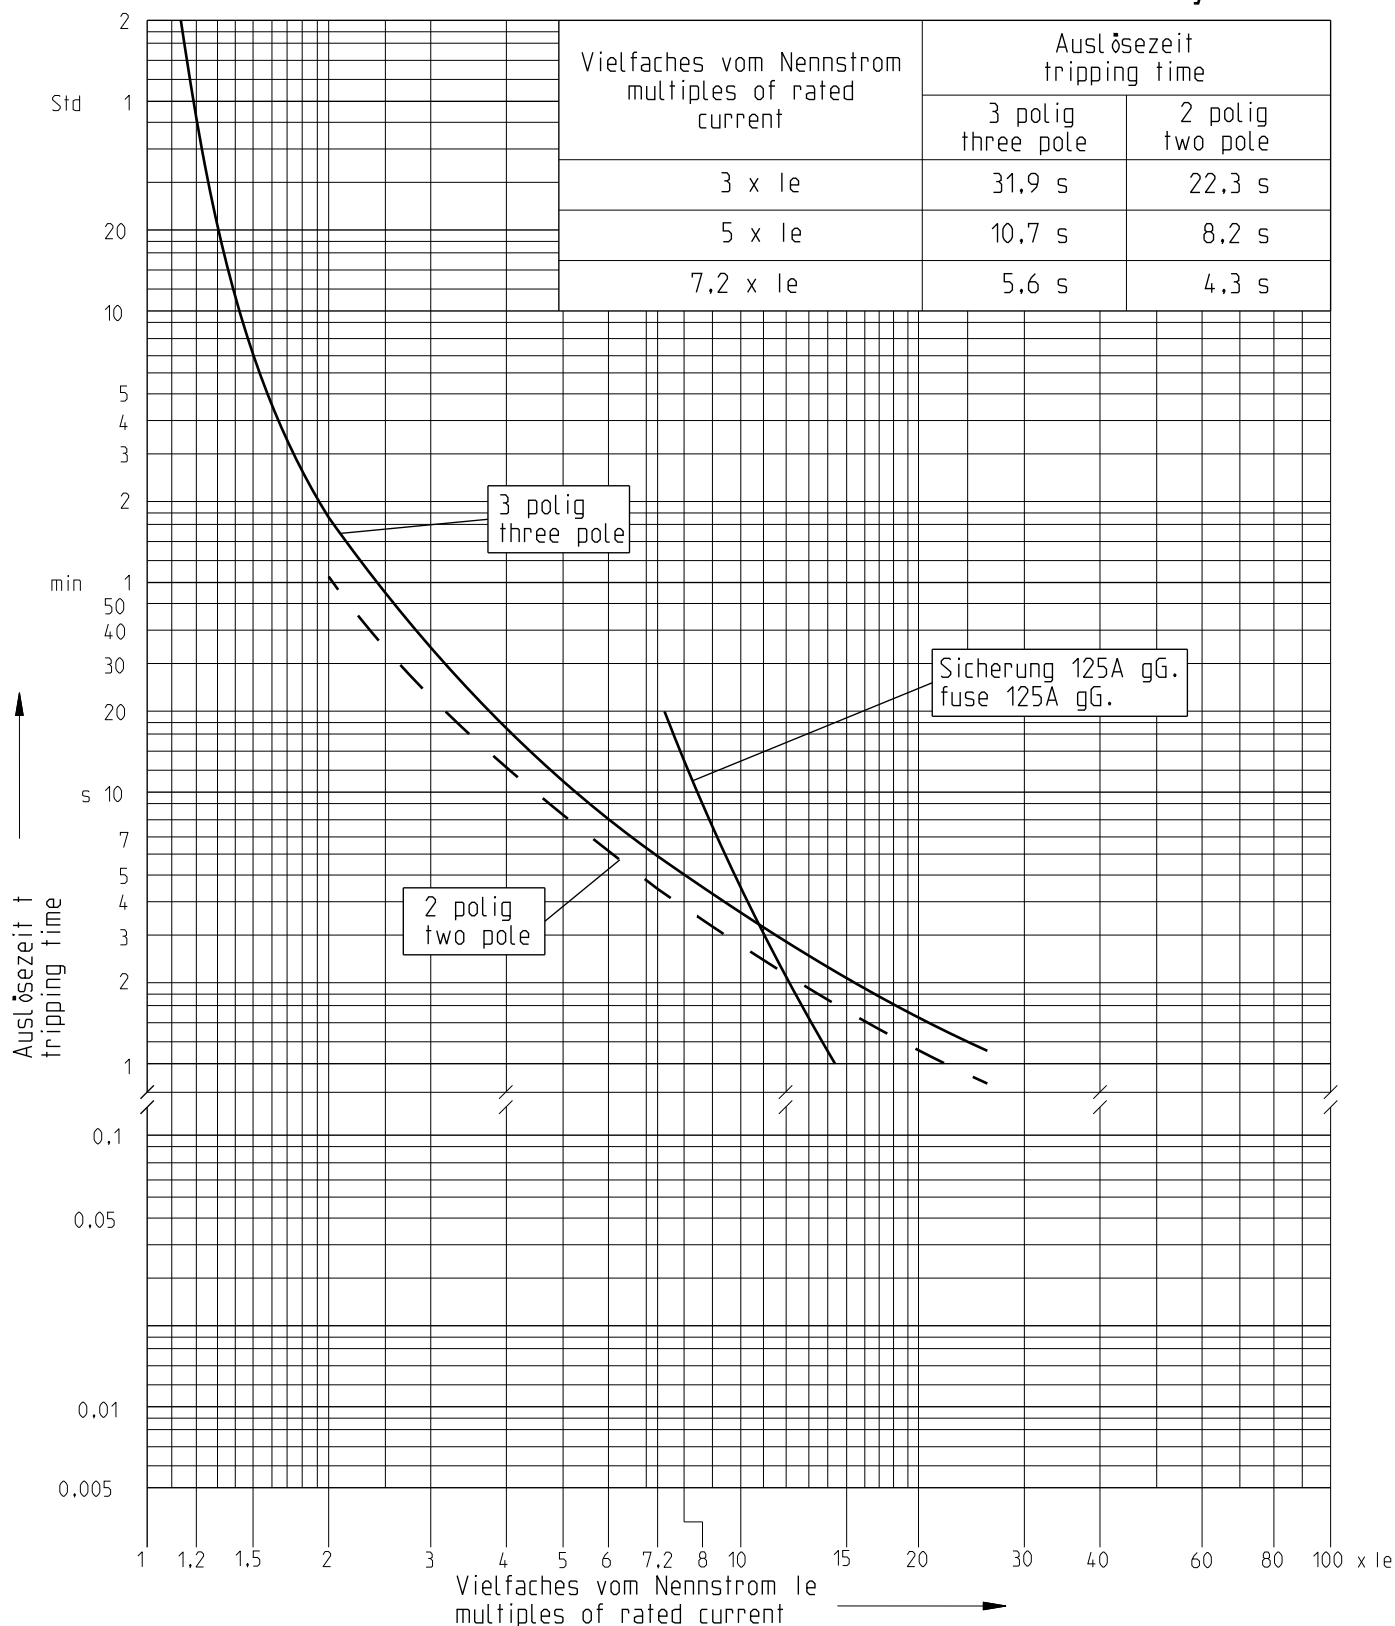

We reserve all rights in this document and in the information contained therein. Reproduction, use or disclosure to third parties without express authority is strictly forbidden. © Copyright 2025 ABB.

Auslösekenlinie (aus kaltem Zustand)
Für Nennströme (3-polig) zwischen dem 3- und 8-fachen des Einstellwertes beträgt die Toleranz der Auslösezeit $\pm 20\%$
Gültig für Geräte mit Produktionsdatum ab 15183 / 2.7.2015.
Tripping characteristic (from cold state)
For currents (3-pole) between 3 and 8 times the current setting the tolerance of the tripping time is $\pm 20\%$
Valid for devices with production date from 15183 / 2.7.2015.

F6

Proprietary and Secret Information	Valid for devices with production date from 19/03/17 until 2019															
	Created by		Christian Halm					Approved by		Mareike Eller						
	Created on		2025-02-05					Approved on		2025-02-20						
	ECN number				ECN date				Department		CDM		Scale		-	
	Revision	C	NoM	1	PRU	DESTO										
	Partname							Drawing		1SAZ800502_06 C.2						
			Title	Tripping characteristic TF65						Format	Language	Sheet No.	No. Sheets			
A4										EN	06	08				
1SAZ800502																