


## Walraven RapidStrut® 'Heavy Duty' Beam Clamp

(H3640)

to connect Strut rails to steel beams

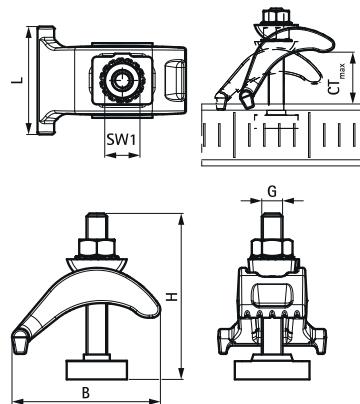

## Features &amp; benefits

- solid cast iron beam clamp for suspension of heavy loads onto beams without welding or drilling
- up to flange thickness 35 mm
- for fixing of all Walraven RapidStrut® to a steel beam
- material: steel
- hot dip galvanized



| Product Number   | For Rail Type                     | Clamping Range | Thread Size | Thread Length | Total Width x Total Height x Total Length | Width | Material Thickness | Torque Moment For Installation | Maximum Allowed Load Faz |
|------------------|-----------------------------------|----------------|-------------|---------------|---|-------|--------------------|--------------------------------|--------------------------|
| Reference letter |                                   | CR             | TS          | TL            | WxHxL                                     | w     | MT                 | Tinst.                         | F <sub>q,z</sub>         |
| Unit description |                                   | mm             | mm          | mm            | mm x mm x mm                              | mm    | mm                 | Nm                             | N                        |
| 6072002          | 41x21, 41x41, 41x51, 41x62, 41x82 | 1 - 35         | M10         | 63            | 52 x 80 x 72                              | 35    | 9.00               | 30                             | 7,800                    |