


TF65 - 30...40A
Therm. Überlastrelais / Therm. Overload Relay

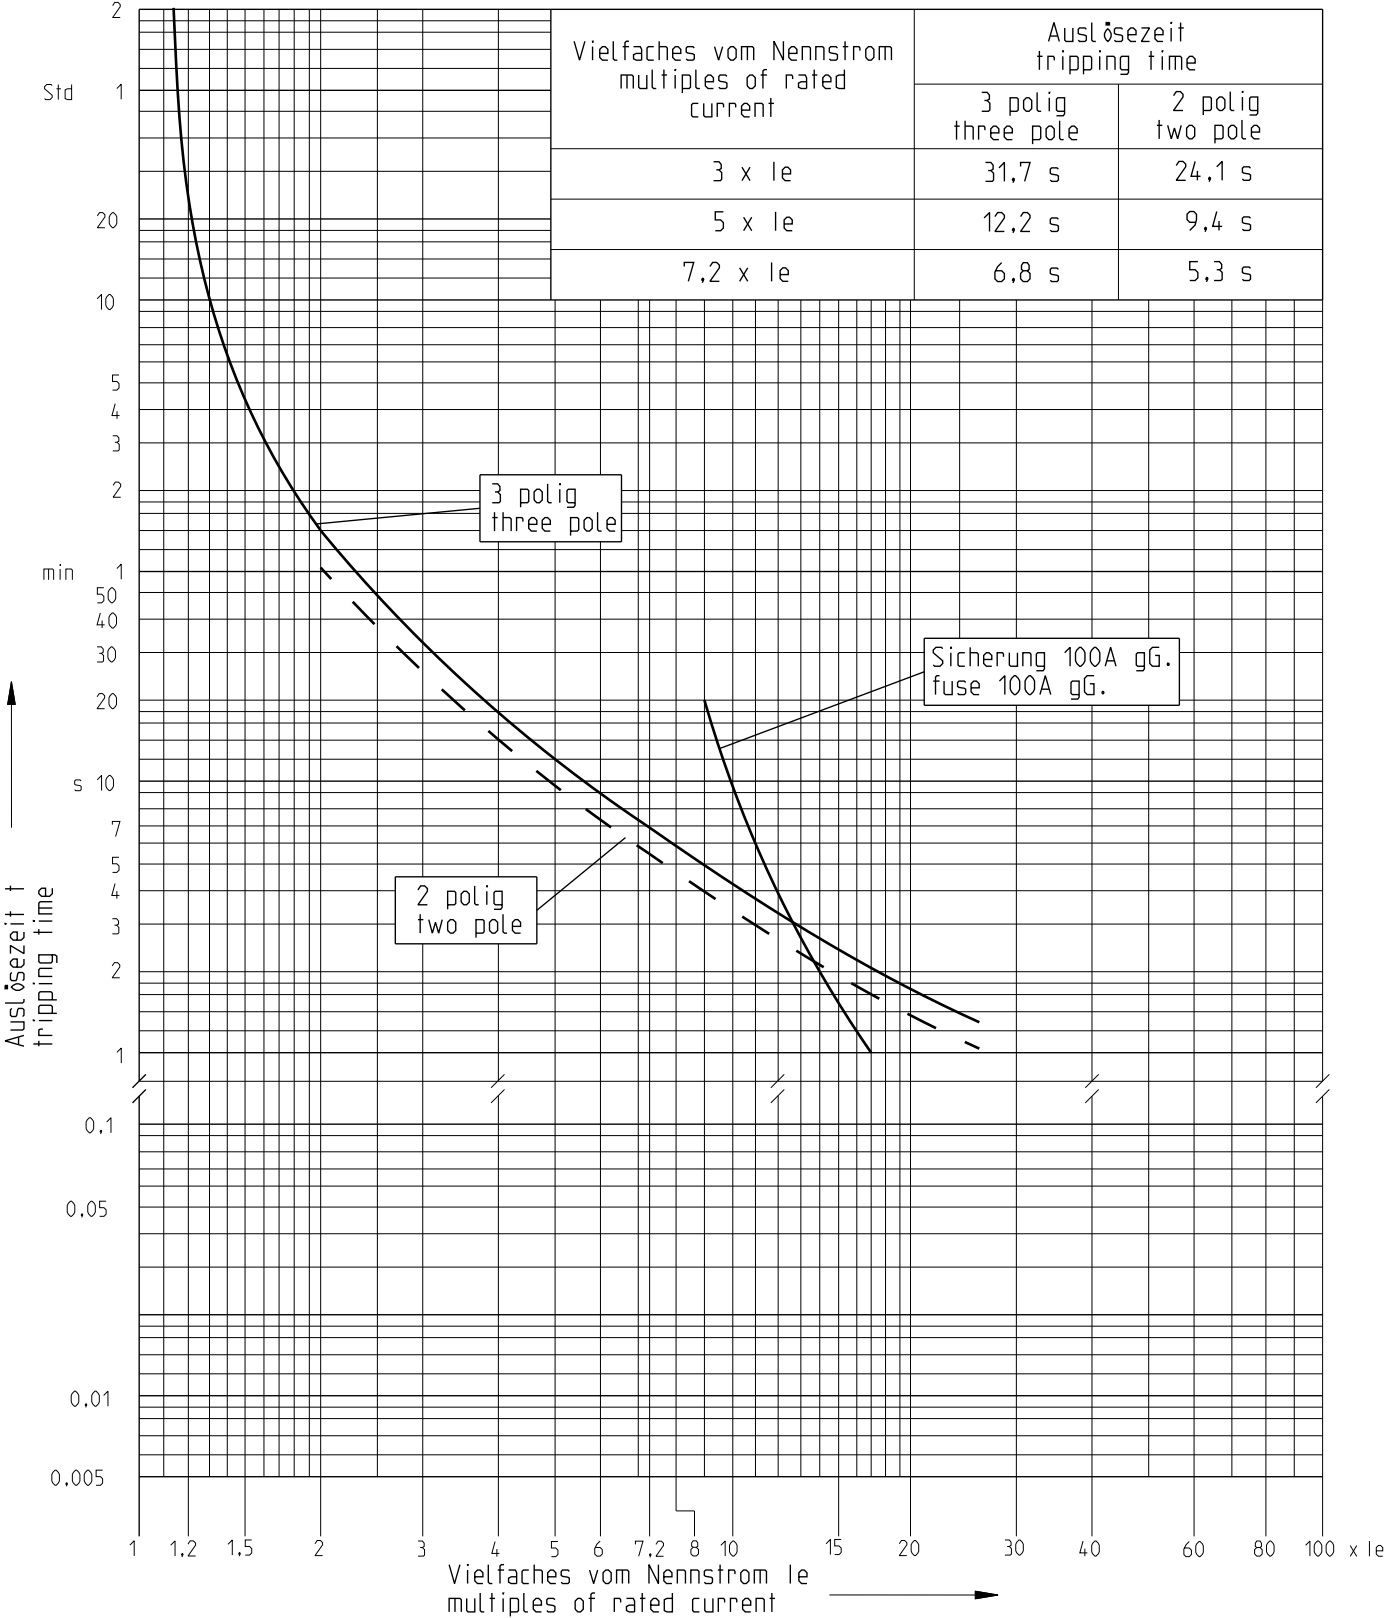

Ablösecharakteristik (aus kaltem Zustand)
Für Nennströme (3-polig) zwischen dem 3- und 8-fachen des Einstellwertes beträgt die Toleranz der Ablösezeit $\pm 20\%$
Gültig für Geräte mit Produktionsdatum ab 15183 / 2.7.2015.
Tripping characteristic (from cold state)
For currents (3-pole) between 3 and 8 times the current setting the tolerance of the tripping time is $\pm 20\%$
Valid for devices with production date from 15183 / 2.7.2015.

F3

We reserve all rights in this document and in the information contained therein. Reproduction, use or disclosure to third parties without express authority is strictly forbidden. © Copyright 2025 ABB.

Proprietary and Secret Information	Created by		Christian Halm		Approved by		Mareike Eller												
	Created on		2025-02-05		Approved on		2025-02-20												
	ECN number				Department		CDM												
	Revision		C		PRU		DESTO												
	Partname				Drawing		1SAZ800502_03 C.2												
Title		Tripping characteristic TF65		Format		A4		Language		EN		Sheet No.		03		No. Sheets		08	
ABB																			

1SAZ800502