


## Raiden 21KLM

Raiden IP66 21KLM 830 Asymmetric Wide  
2824014



### Product features

- Outdoor and indoor floodlight range with in house design, comes complete with 1m flying lead and adjustable bracket, aluminium housing, RAL 9022 - Pearl light grey, clear glass diffuser, IP66, IK08, Class I, 3000K, Non-dimming, 20100lm, 157W, 128lm/W, CRI80, Asymmetric Wide beam angle 110\*50°, 100000 hrs L90B50 lifespan, 511x319x76mm (LxWxH) dimensions, 6.6kg weight. Ball-impact-resistance according to DIN57710-13 VDE 0710 13/5.81, DIN 18032-3 only with the separate wire guard accessory fitted.

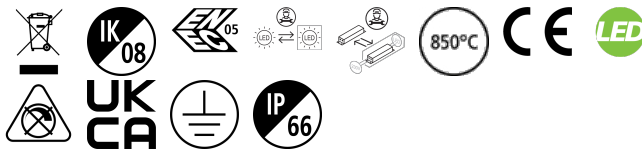

### PRODUCT OVERVIEW

Product name	Raiden IP66 21KLM 830 Asymmetric Wide
Technology	LED
Cap/Base	N/A
Housing	Aluminium
General application	Logistics & Industry
ETIM Class	EC001744
Warranty	5 years
Fixture luminous flux (lm)	20100
Luminaire efficacy (lm/W)	128
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	110*50
Photobiological Risk Group	RG1
Total power consumption (W)	157
Electrical protection	Class I
Dimmable	No
Dimming method	N/A
Housing colour	RAL 9022 - Pearl light grey
IP rating	IP66
IK rating	IK08
Product EAN number	5025768240142

### DATA TABLE

#### General data

Product name	Raiden IP66 21KLM 830 Asymmetric Wide
Technology	LED
Cap/Base	N/A
Housing	Aluminium
General application	Logistics & Industry
Operating temperature range (°C)	-40°C...+50°C

## Raiden 21KLM

*Raiden IP66 21KLM 830 Asymmetric Wide*  
2824014

Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
Warranty	5 years

### Optical data

Fixture luminous flux (lm)	20100
Luminaire efficacy (lm/W)	128
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	110*50
Photobiological Risk Group	RG1

### Electrical data

Total power consumption (W)	157
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	20
Electrical protection	Class I
Control gear required	No
Dimmable	No
Dimming method	N/A
Drive current (mA)	3200
Inrush Current (A)	110
Inrush Duration (µs)	200
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	6
Max. products per 13A C Breaker	7
Max. products per 16A C Breaker	10
Max. products per 20A C Breaker	12
Max. products per 10A B Breaker	3
Max. products per 13A B Breaker	4
Max. products per 16A B Breaker	6
Max. products per 20A B Breaker	7
Mains surge immunity (differential mode - > L-N) (kV)	6
Mains surge immunity (common mode -> L/N - GND) (kV)	10

### Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	94000
Lifespan L90 B50	100000

## Raiden 21KLM

*Raiden IP66 21KLM 830 Asymmetric Wide*  
2824014

### Physical data

Housing colour	RAL 9022 - Pearl light grey
IP rating	IP66
IK rating	IK08
Nominal Product Length (mm)	511
Nominal Product Width (mm)	319
Nominal Product Height (mm)	76
Weight (kg)	6.6


### Packaging

Single packaging type	Carton
Product EAN number	5025768240142
Packaging single length / height (cm)	56.0
Packaging single width (cm)	41.5
Packaging single depth (cm)	14.0
DUN14 (outer)	05025768240142
Units per outer package	1
Packaging outer length / height (cm)	56.0
Packaging outer width (cm)	41.5
Packaging outer depth (cm)	14.0

### Safety data

Optimal operating condition (°C)	-40-50
----------------------------------	--------

## PHOTOMETRY

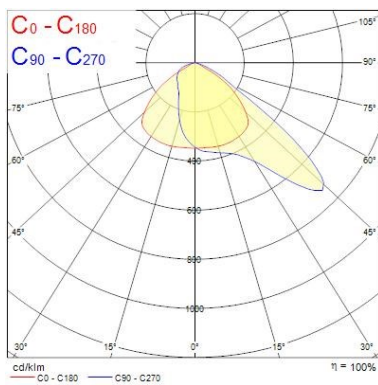

## TECHNICAL DRAWINGS

