

28 613 970



- INTENSE RAIN, flow rate max. 8 l/min
- Function from: 6 l/min
- with anti-scale system

Technical data:

- 156-mm projection
- ball-joint pivotable through 30°
- rosette Ø 60 mm
- 1/2" connection

Notes:

	Brushed Dark Brass (PVD)	28 613 970-39
	Chrome	28 613 970-00
	Dark Chrome	28 613 970-19
	Light Gold (PVD)	28 613 970-26
	Brushed Light Gold (PVD)	28 613 970-27
	Matte Black	28 613 970-33
	Brushed Gold (PVD)	28 613 970-37
	Brushed Bronze (PVD)	28 613 970-42
	Brushed Dark Bronze (PVD)	28 613 970-43
	Brushed Chrome	28 613 970-93
	Brushed Dark Platinum	28 613 970-99

Recommended miscellaneous




Concealed wall elbow -

- min. recess depth 90 mm
- max. recess depth 163 mm

35 085 970 90

28 613 970

mm [inches]

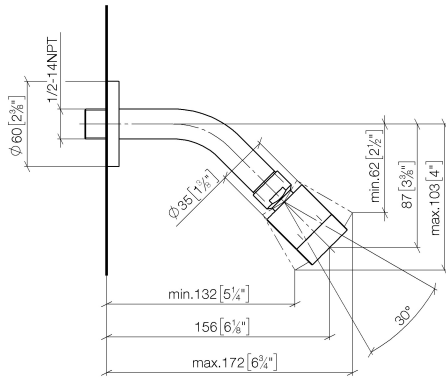

Flow rate chart

