

# Concord

## BEACON XXL MB HO 3K L3 BLK 2059311



### Features

- 2059311 BEACON XXL MB HO 3K L3 BLK Integrated LED spotlight, black RAL 9005, compact and minimalist design, ideal for double height spaces, retail and display applications, die-cast aluminium body, passive cooling heatsink, beam angle: 50° medium beam, optics: Silicone lens for controlled beam, colour temperature: 3000K warm white, total system power: 48W, total fixture output: 4269lm, luminaire efficacy: 89lm/W, LOR: 100%, colour rendering: Ra 85 typical, LED Chromacity: 3 step MacAdam ellipse, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 1200mA, electronic driver, non-dimmable, switched only, power factor: 0.98 electrical protection: CLASS I, 3-circuit track adaptor, suitable for Concord Lytespan 3 track, ingress protection rating: IP20, suitable for internal environment only, horizontal rotation: 355°, vertical tilt: 90°, lockable positioning using Allen key, dime...

### Product Overview


|                            |                            |
|----------------------------|----------------------------|
| Product name               | BEACON XXL MB HO 3K L3 BLK |
| Technology                 | LED                        |
| Cap/Base                   | N/A                        |
| Housing                    | Aluminium                  |
| Mount                      | Track mounting             |
| Environment                | Internal                   |
| E-number FI                | 4278857                    |
| E-number SE                | 7401269                    |
| Fixture luminous flux (lm) | 4269                       |
| Luminaire efficacy (lm/W)  | 88.94                      |
| LOR (%)                    | 100                        |
| Colour temperature (K)     | 3000                       |
| Light colour               | Warm White                 |
| CRI (Ra)                   | 85                         |

# Concord

## BEACON XXL MB HO 3K L3 BLK 2059311

|                             |                    |
|-----------------------------|--------------------|
| Colour Consistency (SDCM)   | 3                  |
| Photobiological Risk Group  | RG1                |
| Total power consumption (W) | 48                 |
| Electrical protection       | Class I            |
| Control gear type           | Electronic ballast |
| Housing colour              | Black              |
| IP rating                   | IP20               |
| Product EAN number          | 5025768593118      |
| Warranty                    | 5 years            |

### Photometry

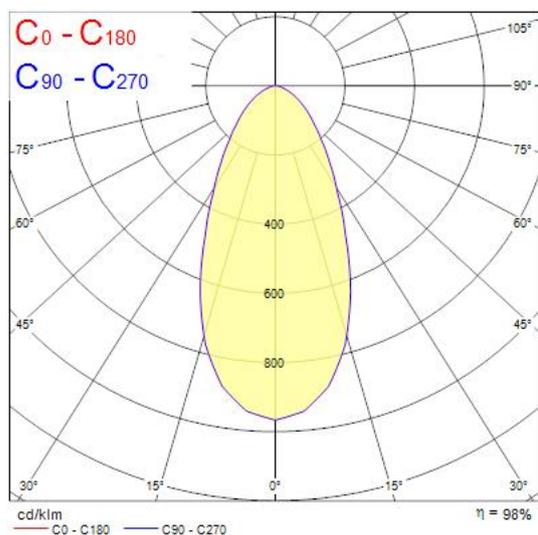

### Technical drawings

