


Data Sheet | Item Number: 734-170/108-000

THT male header; 1.0 x 1.0 mm solder pin; angled; 100% protected against mismatching; Threaded flange; Pin spacing 3.5 mm; 10-pole; light gray

<https://www.wago.com/734-170/108-000>



Color: ■ light gray

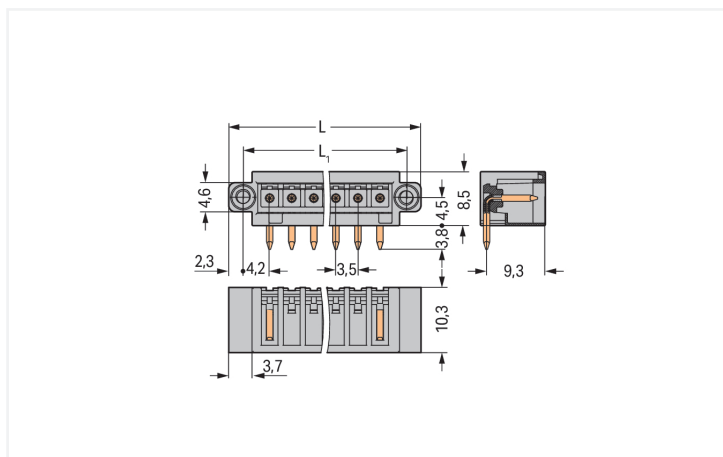


Dimensions in mm

$L = (\text{pole no.} \times \text{pin spacing}) + 9.5 \text{ mm}$
 $L1 = (\text{pole no.} \times \text{pin spacing}) + 4.9 \text{ mm}$

Male connector, 734 Series, solder pin dimensions 1 x 1 mm

Our male connector (item number 734-170/108-000) is designed for seamless electrical installations. The item's dimensions are (44.5 x 12.3 x 10.3) mm (width x height x depth).

Tin is used for coating the contact surfaces. THT is used to assemble the pcb connector.

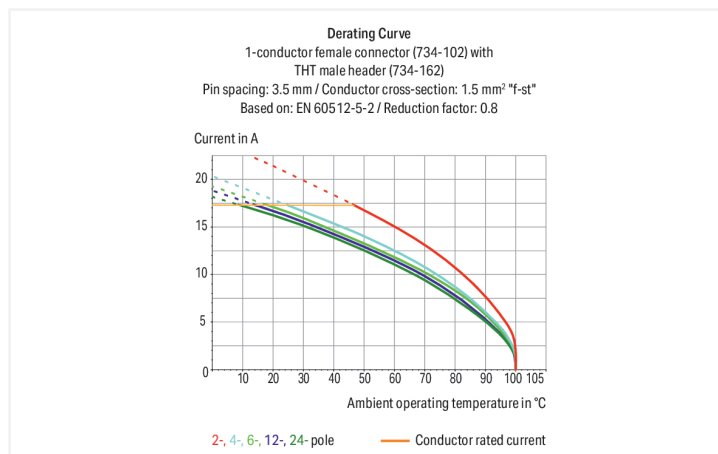



Notes	
Safety Information	The MCS – MULTI CONNECTION SYSTEM includes connectors without breaking capacity in accordance with DIN EN 61984. When used as intended, these connectors must not be connected/disconnected when live or under load. When used as intended, these connectors must not be connected/disconnected when live or under load. The circuit design should ensure header pins, which can be touched, are not live when unmated.
Variants:	Other pole numbers Gold-plated or partially gold-plated contact surfaces Other versions (or variants) can be requested from WAGO Sales or configured at https://configurator.wago.com/ .

Electrical data			
Ratings per		IEC/EN 60664-1	
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	160 V	160 V	320 V
Rated impulse withstand voltage	2.5 kV	2.5 kV	2.5 kV
Rated current	10 A	10 A	10 A
Approvals per		UL 1059	
Use group	B	C	D
Rated voltage	300 V	-	300 V
Rated current	10 A	-	10 A
Approvals per		CSA	
Use group	B	C	D
Rated voltage	300 V	-	300 V
Rated current	10 A	-	10 A

Connection Data	
Total number of potentials	10
Number of connection types	1
Number of levels	1
Connection 1	
Pole number	10

Physical data	
Pin spacing	3.5 mm / 0.138 inches
Width	44.5 mm / 1.752 inches
Height	12.3 mm / 0.484 inches
Height from the surface	8.5 mm / 0.335 inches
Depth	10.3 mm / 0.406 inches
Solder pin length	3.8 mm
Solder pin dimensions	1 x 1 mm
Drilled hole diameter with tolerance	1.4 (+0.1) mm

Mechanical data	
Variable coding	Yes
Anti-rotation protection	Yes



Plug-in connection		
Contact type (pluggable connector)		Male connector/plug
Connector (connection type)		for PCB
Mismating protection		Yes
Mating direction to the PCB		0°
Locking of plug-in connection		Threaded flange

PCB contact		
PCB contact		THT
Solder pin arrangement		over the entire male connector (in-line)
Number of solder pins per potential		1

Material data		
Note (material data)		Information on material specifications can be found here
Color		light gray
Material group		I
Insulation material (main housing)		Polyamide (PA66)
Flammability class per UL94		V0
Contact material		Electrolytic copper (E _{Cu})
Contact Plating		Tin
Fire load		0.048 MJ
Weight		3.2 g

Environmental requirements		
Limit temperature range		-60 ... +100 °C
Processing temperature		-35 ... +60 °C

Commercial data		
Product Group		3 (Multi Conn. System)
PU (SPU)		100 pcs
Packaging type		Box
Country of origin		PL
GTIN		4045454683108
Customs tariff number		85366930000

Product Classification		
UNSPSC		39121409
eCl@ss 10.0		27-44-04-02
eCl@ss 9.0		27-44-04-02
ETIM 9.0		EC002637
ETIM 10.0		EC002637
ECCN		NO US CLASSIFICATION



Environmental Product Compliance	
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c)
SCIP notification number (Austria)	e7197af9-00c0-4d5f-92f9-f9f232f2b320
SCIP notification number (Belgium)	a0cdfc48-72fa-46c6-ae0b-9577df797c36
SCIP notification number (Bulgaria)	875f74c6-5c91-4db9-9db7-b794969618b4
SCIP notification number (Czech Republic)	93d3a99a-57d0-4ae2-84db-8c6fbaf33225
SCIP notification number (Denmark)	db2a92c5-b58d-49c9-a776-f58fcf376c62
SCIP notification number (Finland)	a11e71ca-4c71-428e-8394-30c3f075c0ca
SCIP notification number (France)	a3b86de8-9688-4471-8579-e6c650d256f1
SCIP notification number (Germany)	2410a02e-1317-46da-8859-5dd7868249c3
SCIP notification number (Hungary)	52910e9c-7da2-44eb-8563-1cb03e40bf45
SCIP notification number (Italy)	6b976989-facb-4fb5-bc39-0071f4f31ef2
SCIP notification number (Netherlands)	9fe41a52-850b-4b93-a881-b919d62e2953
SCIP notification number (Poland)	5feff024-b6b0-4183-bf4b-e4608d25ab96
SCIP notification number (Romania)	c4d87a29-07ad-4b43-a566-599e1c15ab4e
SCIP notification number (Sweden)	1351d86e-8a53-4bbf-b490-058a16712d2b

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance
734-170/108-000

↓

Documentation

Additional Information

Technical Section

03.04.2019

pdf
2027.26 KB

↓

CAD/CAE-Data

CAD data

2D/3D Models
734-170/108-000

↓

CAE data

ZUKEN Portal
734-170/108-000

↓

PCB Design

Symbol and Footprint
via SamacSys
734-170/108-000

↓

Symbol and Footprint
via Ultra Librarian
734-170/108-000

↓

1 Compatible Products

1.1 System counterpart

1.1.1 Female connector/socket



Item No.: 734-110/107-000
1-conductor female connector; CAGE CLAMP®; 1.5 mm²; Pin spacing 3.5 mm; 10-pole; 100% protected against mismatching; Screw flange; 1,50 mm²; light gray



Item No.: 2734-110/107-000
1-conductor female connector; push-button; Push-in CAGE CLAMP®; 1.5 mm²; Pin spacing 3.5 mm; 10-pole; 100% protected against mismatching; Screw flange; 1,50 mm²; light gray

1.2 Optional Accessories

1.2.1 Coding

1.2.1.1 Coding




Item No.: 734-159
Coding key; to be snapped above top level; black



Item No.: 734-130
Coding key; to be snapped above top level; white

Installation Notes

Coding



Coding a male header – fitting coding key(s).