


Walraven RapidStrut® Cross Connector pre-assembled Type G2

Technical Data Sheet


All tests with rails type L (1.5 mm thickness) are made according RAL-GZ 655 guideline. Installation torque T (Nm) and other details are mentioned in the data table.

Walraven RapidStrut® Cross Connector G2 (BUP1000)

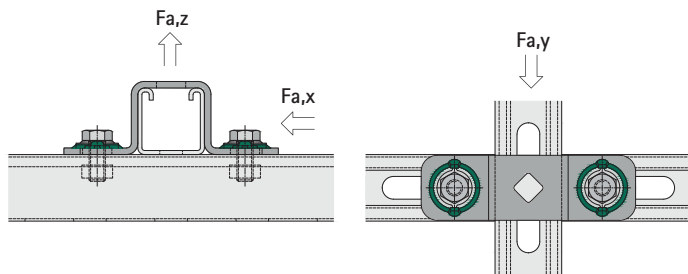

In combination with RapidStrut® Channels Type L (1.5mm):

Art.no.	Type	T (Nm)	Fa,z (N)	Fa,x (N)	Fa,y (N)
665885402	21	25	3,610	2,970	500
665885404	41	25	3,610	2,970	500
665885405	51	25	3,610	2,970	500
665885406	62	25	3,610	2,970	500
665885408	82	25	3,610	2,970	500

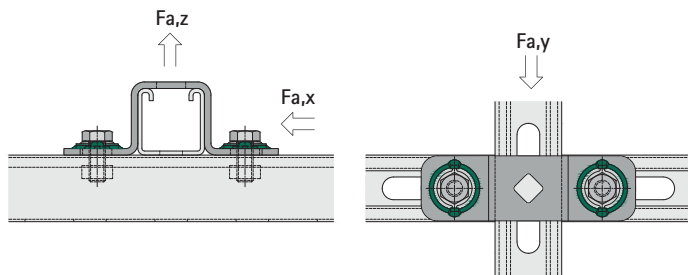

In combination with RapidStrut® Channels Type H (2.5mm):

Art.no.	Type	T (Nm)	Fa,z (N)	Fa,x (N)	Fa,y (N)
665885402	21	35	8,420	4,380	1,150
665885404	41	35	8,420	4,380	1,150
665885405	51	35	8,420	4,380	1,150
665885406	62	35	8,420	4,380	1,150
665885408	82	35	8,420	4,380	1,150

Find out how we can support you

Would you like to find out more about any of the solutions described in this Technical Data Sheet?
Or would you like to discuss how we could help you find the best possible solution for your project?
Get in touch today!

Walraven International

Industrieweg 5
3641 RK Mijdrecht (NL)
Tel. +31 297 23 30 00
Fax +31 297 23 30 99
export@walraven.com

Walraven Group

Mijdrecht (NL) · Tienen (BE) · Bayreuth (DE) · Banbury (GB) · Malmö (SE) · Grenoble (FR) · Barcelona (ES) · Milan (IT)
Kraków (PL) · Mladá Boleslav (CZ) · Kyiv (UA) · Danville (US) · Shanghai (CN) · Dubai (AE) · Budapest (HU) · Mumbai (IN)
Singapore (SG) · Burlington (CA)