

28 508 979










- spray head Ø 92mm
- Three settings: COMPACT RAIN, COMPACT SOFT FLOW, COMPACT AQUAPRESSURE FLOW, max. flow rate 6.8 l/min (at 3 bar)
- Function from: 5 l/min
- with anti-scale system

**Technical data:**

- 200-mm projection
- ball-joint pivotable through 30°
- rosette Ø 55 mm
- 1/2" connection

**Notes:**

	Brushed Gold (PVD)	28 508 979-37 0010
	Chrome	28 508 979-00 0010
	Brushed Platinum	28 508 979-06 0010
	Platinum	28 508 979-08 0010
	Dark Chrome	28 508 979-19 0010
	Light Gold (PVD)	28 508 979-26 0010
	Brushed Light Gold (PVD)	28 508 979-27 0010
	Brushed Durabrass (23kt Gold)	28 508 979-28 0010
	Matte Black	28 508 979-33 0010
	Brushed Dark Brass (PVD)	28 508 979-39 0010
	Brushed Bronze (PVD)	28 508 979-42 0010
	Brushed Dark Bronze (PVD)	28 508 979-43 0010
	Brushed Champagne (22kt Gold)	28 508 979-46 0010
	Champagne (22kt Gold)	28 508 979-47 0010
	Brushed Chrome	28 508 979-93 0010
	Brushed Dark Platinum	28 508 979-99 0010


Recommended miscellaneous



- Concealed wall elbow -** 35 085 970 90
- min. recess depth 90 mm
  - max. recess depth 163 mm

28 508 979

mm [inches]

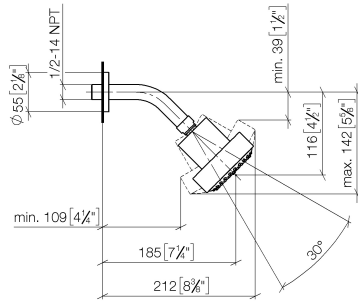

Codes & Standards

DIN 4109

ISO 3822

Ü-Zeichen

Certificates and sustainability

LGA\_38

28 508 979

