



### Features

- Surface or Suspended LED luminaire with Micro Prismatic Optic, Direct Light Distribution, Luminaire Dimensions: 1447x187x56mm, White body colour, IP20, IK07, SylSmart Standalone capable, Low LED flicker (+/-5%), Neutral White (4000K) LED Colour Temperature, 4700lm, 37W, 127lm/W efficacy, CRI>80, 3 SDCM (3-step MacAdam ellipse) LED Colour Consistency, UGR<18, Luminance at 65° < 3000 cd/m<sup>2</sup>, Lifespan: 96,000 hours L80B20, Quick electrical connection with push-connectors in the luminaire, Glow Wire Test 850°C.

### Product Overview

<b>Product name</b>	RANA NEO 4700LM S 1500 840 SSC 1L WHITE
<b>Technology</b>	LED (3 SDCM)
<b>Cap/Base</b>	N/A
<b>Housing</b>	Steel
<b>Mount</b>	Ceiling surface mounting, Suspended
<b>Fixture luminous flux (lm)</b>	4700
<b>Luminaire efficacy (lm/W)</b>	127
<b>Colour temperature (K)</b>	4000
<b>Light colour</b>	Neutral White
<b>CRI (Ra)</b>	80
<b>Colour Variation Initial (SDCM)</b>	3
<b>Glare control</b>	< 18
<b>Photobiological Risk Group</b>	RG0
<b>Total power consumption (W)</b>	37
<b>Electrical protection</b>	Class I
<b>Control gear type</b>	LED driver constant current
<b>LED Flickering Rate</b>	Ultra low (5% or less)
<b>Housing colour</b>	RAL 9016 - Traffic white / Bezel
<b>IP rating</b>	IP20
<b>IK rating</b>	IK07

Light your world

## RANA NEO 4700LM S 1500 840 SSC 1L WHITE 0054251


Product EAN number

5410288542515


Warranty

5 years

### Photometry

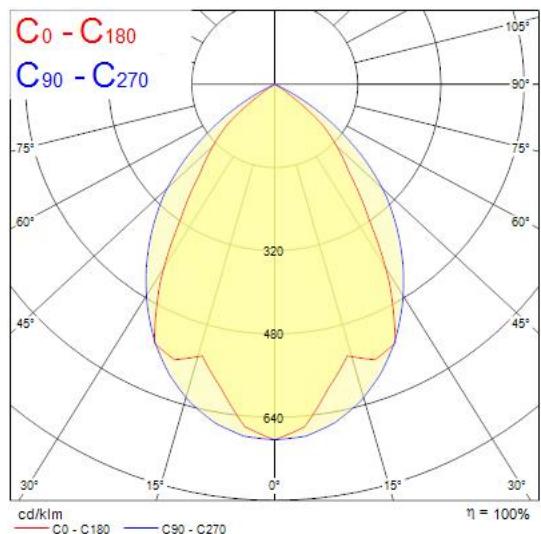

### Technical drawings

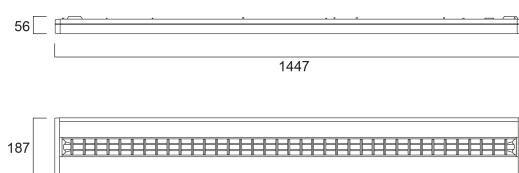

Light your world