


BAP-H1616: Ball valve with handle Press 16x16

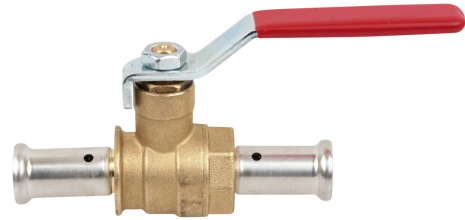

Commercial information

Messing bolkraan met 2 perskoppelingen. Handvat heeft een rode coating

Certificates

Applications

Potable water, Heating, Compressed air, Sanitary

Solutions

Building installations, Industry, Utility

Technical characteristics

Surface protection ball	None	Diameter bolt hole	16
Material secondary spindle seal	Ethylene-propylene diene monomer rubber (EPDM)	Outer pipe diameter connection 1	16 Millimetre
Nominal diameter connection 1	DN 12	Outer pipe diameter connection 2	16 Millimetre
Connection 1	Press sleeve	Medium temperature (continuous)	-10 70 Degrees celsius
With coupling connection 1	✓		
Contour code connection 1	TH/BE		
Nominal diameter connection 2	DN 8		
Connection 2	Press sleeve		
With coupling connection 2	✓		
Contour code connection 2	TH/BE		
Sealing	Polytetrafluoroethylene (PTFE)		
With drain valve	✗		
With drain possibility (connection)	✗		
With filter	✗		
With thermometer	✗		
Model	Straight		
With insulation shell	✗		
FM quality mark	✗		
UL quality mark	✗		
ULC quality mark	✗		
LPCB quality mark	✗		
Fire-safe	✗		
Medically clean	✗		
Grease-free	✗		
Operation	Lever handle		
Full bore	✓		
VdS quality mark	✗		
DVGW quality mark for gas	✗		
DVGW quality mark for water	✗		
KIWA certified	✗		
Type approval according to BBR/EKS	✗		

Related products

Product code	GTIN	Description
BE20	05414764059351	Henco Jaws (universal) BE/TH-Profile 20x2
100-R160212	05414764059351	Henco RIXc Ø16x2 100m

Image

