


BAP-H2626: Ball valve with handle Press 26x26

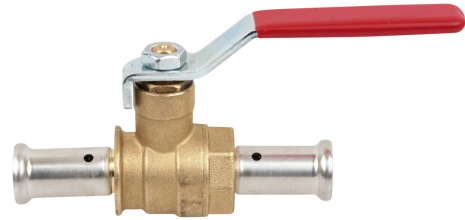

Commercial information

Messing bolkraan met 2 perskoppelingen. Handvat heeft een rode coating

Certificates

Applications

Potable water, Heating, Sanitary

Solutions

Building installations, Industry, Utility

Technical characteristics

Surface protection ball	None	Diameter bolt hole	26
Material secondary spindle seal	Ethylene-propylene diene monomer rubber (EPDM)	Outer pipe diameter connection 1	26 Millimetre
Nominal diameter connection 1	DN 15	Outer pipe diameter connection 2	26 Millimetre
Connection 1	Press sleeve	Medium temperature (continuous)	-10 70 Degrees celsius
With coupling connection 1	✓	Wrench width	0 Millimetre
Contour code connection 1	TH/BE	Wrench width union nut	0 Millimetre
Nominal diameter connection 2	DN 15		
Connection 2	Press sleeve		
With coupling connection 2	✓		
Contour code connection 2	TH/BE		
Sealing	Polytetrafluoroethylene (PTFE)		
With drain valve	✗		
With drain possibility (connection)	✗		
With filter	✗		
With thermometer	✗		
Model	Straight		
With insulation shell	✗		
FM quality mark	✗		
UL quality mark	✗		
ULC quality mark	✗		
LPCB quality mark	✗		
Fire-safe	✗		
Medically clean	✗		
Grease-free	✗		
Operation	Lever handle		
Full bore	✓		
KIWA certified	✗		

Related products

Product code	GTIN	Description
BE26	05414764059382	Henco Jaws (universal) BE/TH-Profile 26x3
50-R260320	05414764059382	Henco RIXc Ø26x3 50m

Image

