


Beacon LED XXL

BEACON XXL WB O/B DIM 4K L3 WHT
2093063



Product features

- 2093063 BEACON XXL WB O/B DIM 4K L3 WHT Integrated LED spotlight, white RAL 9016, compact and minimalist design, ideal for double height spaces, retail and display applications, die-cast aluminium body, passive cooling heatsink, beam angle: 67° wide beam, optics: Fresnel lens for controlled beam, colour temperature: 4000K neutral white, total system power: 48W, total fixture output: 4884lm, luminaire efficacy: 102lm/W, LOR: 100%, colour rendering: Ra 93 typical, LED Chromacity: 3 step MacAdam ellipse, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 1200mA, electronic driver, dimmable, on-board potentiometer for dimming control, power factor: 0.98 electrical protection: CLASS I, 3-circuit track adaptor, suitable for Concord Lytespan 3 track, ingress protection rating: IP20, suitable for internal environment only, horizontal rotation: 355°, vertical tilt: 90°, lockable po...

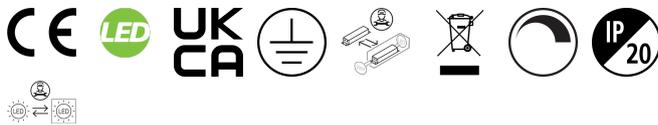

PRODUCT OVERVIEW

Product name	BEACON XXL WB O/B DIM 4K L3 WHT
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting
Environment	Internal
General application	Retail
ETIM Class	EC001744
E-number FI	4278835
Warranty	5 years
Fixture luminous flux (lm)	4884
Luminaire efficacy (lm/W)	101.75
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	93
Colour Consistency (SDCM)	3
Beam Angle (°)	67
Photobiological Risk Group	RG1
Total power consumption (W)	48
Electrical protection	Class I
Control gear type	Electronic ballast
Dimmable	Yes
Dimming method	Mains: leading / trailing edge
Housing colour	White
IP rating	IP20
Product EAN number	5025768930630

DATA TABLE

Beacon LED XXL

BEACON XXL WB O/B DIM 4K L3 WHT
2093063

General data

Product name	BEACON XXL WB O/B DIM 4K L3 WHT
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting
Environment	Internal
General application	Retail
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
E-number FI	4278835
Warranty	5 years

Optical data

Fixture luminous flux (lm)	4884
Luminaire efficacy (lm/W)	101.75
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	93
Colour Consistency (SDCM)	3
Adjustable chromaticity	N
Beam Angle (°)	67
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	48
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.98
Electrical protection	Class I
Control gear type	Electronic ballast
Dimmable	Yes
Dimming method	Mains: leading / trailing edge
Drive current (mA)	1200
Energy Efficiency Class (A->G) of contained light source	E

Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	100000
Lifespan L90 B10	55500

Physical data

Housing colour	White
IP rating	IP20
Diffuser finish	Diffuse
Reflector finish	None

Beacon LED XXL

BEACON XXL WB O/B DIM 4K L3 WHT
2093063

Nominal Product Length (mm)	85
Nominal Product Width (mm)	168
Nominal Product Height (mm)	205
Weight (kg)	1.415

Packaging


Single packaging type	Carton
Product EAN number	5025768930630
Packaging single length / height (cm)	25.0
Packaging single width (cm)	19.5
Packaging single depth (cm)	20.0
DUN14 (outer)	05025768930630
Units per outer package	1
Packaging outer length / height (cm)	25.0
Packaging outer width (cm)	19.5
Packaging outer depth (cm)	20.0

PHOTOMETRY

0.5	0.66	E(0°) E(C0)	1769 5217
1.0	1.32	E(0°) E(C0)	4424 1304
1.5	1.99	E(0°) E(C0)	1993 590
2.0	2.65	E(0°) E(C0)	1121 328
2.5	3.31	E(0°) E(C0)	713 209
3.0	3.97	E(0°) E(C0)	496 145

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 67.0°)

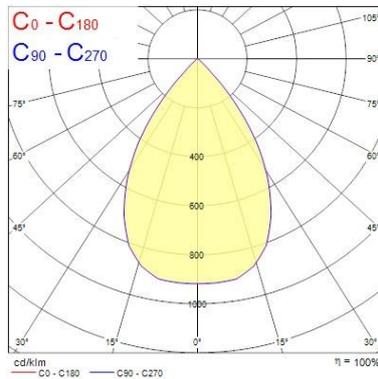

TECHNICAL DRAWINGS

