


## VSKEK-0502: Extension or body for manifold, 2 eurocone connections 2x3/4"

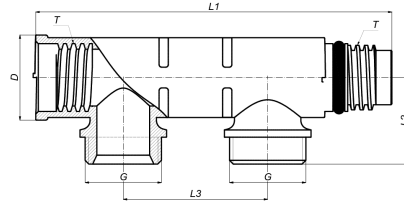

### Commercial information

Full Flow Manifold the universal synthetic distributor with 2 to 12 outputs (and more).

Advantages:

- A separate pipe circuit for each tap point; connections in the floor can thus be avoided.
- Multifunctional and modular.
- 100 % corrosion-free.
- Maximum amount of connections in very short construction length.
- Improves the balance in a system.
- Cost-effective solution.
- Fixing materials available.
- KIWA, KOMO and ATG approved.
- Suitable for both press and push-fit applications.
- Can be fitted with a 3/8" air vent (matching article 18EK-0503).
- Various group connections in 3/4" eurocone possible.

Connections: Push-fit, Press PVDF, Press brass, Ball valve for C/H applications, Manifold: Henco dimensions internal thread x external thread, Groups: Eurocone 3/4".

Supply diameters: 20mm and 26mm.

#### Certificates

QB (CSTBat), ETA, KIWA, ÖVGW Wasser, SINTEF, SITAC, KOMO, STF, GOST-R, TSU, EMI

#### Applications

Potable water, Heating, Cooling, Sanitary







#### Solutions







Building installations, Industry, Utility

## Technical characteristics

Suitable for tap water	✓	Outer pipe diameter connection 1	16 Millimetre
Suitable for central heating water	✓	Number of branches	2
Suitable for cooling water	✓	Number of branching directions	1
Suitable for compressed air	✗	Distance between offset	50 Millimetre
Suitable for glycol	✓	Max. medium temperature (continuous)	70 Degrees celsius
Mounting method	Surface mounting	Width	45 Millimetre
Model	Distributor/collector	Height	30 Millimetre
Material	Plastic	Length distributor	124 Millimetre
Material quality	Polyvinylidene fluoride (PVDF)		
Surface protection	Untreated		
Shape	Throughflow with straight branches		
Connection 1	Internal thread cylindrical BSPP-G (ISO 228-1)		
Nominal diameter connection 2	3/4 inch (20)		
Connection 2	External thread cylindrical BSPP-G (ISO 228-1)		
Nominal diameter branches	3/4 inch (20)		
Connection branches	Euroconus (expired)		
Deviant distance between branches	✗		
System specific	✓		
With filling/drain tap	✗		
With shut off valve	✗		
With de-aeration	✗		
With wall-mounting bracket	✗		
With mounting material	✗		
With legs	✗		

## Related products

Product code	GTIN	Description	Image
VVSK-20	05414764063853	Henco Straight entry piece Ø20	
VVPK90-20-U	05414764063853	Henco Bend entry piece up 90° - press Ø20	
VVPK90-20-D	05414764063853	Henco Bend entry piece down 90° - press Ø20	
VVPK-20	05414764063853	Henco Straight entry piece - Press Ø20	
VDSK-20	05414764063853	Henco Straight female adapter for manifold or manifold extension Ø20	
VDEK-T05	05414764063853	Henco T-connection piece - 2x eurocone	

Product code	GTIN	Description	Image
VS-ENDCAP	05414764063853	Henco Endcap female for manifold	
19P-1605	05414764063853	Henco Press adapter to eurocone 16x3/4"	
VVSK-T20M20	05414764063853	Henco T-Piece for supply for manifold Ø20	
VS-ENDCAP-M	05414764063853	Henco Henco End plugmale for manifold	
33P-1605	05414764063853	Henco Bend 90° Nickel plated adapter Press to eurocone 16x3/4"	
19SK-1605	05414764063853	Henco Push fitting with eurocone connection 16x3/4"	
19PK-1605	05414764063853	Henco Press to eurocone 16x3/4"	
VB-EK05	05414764063853	Henco Ball valve, 2 x eurocone connection	
VSKEK-0503	05414764063853	Henco Extension or body for manifold, 3 eurocone connections 3x3/4"	