

# Concord

## PIXER RECESSED 325X325 HO 1P 4000K DALI

2069342



### Features

- PIXER RECESSED 325X325 HO 1P 4000K DALI is a high performance low glare office luminaire with an adjustable light pod to enhance architectural design. Diffuser is made of optical grade polycarbonate with an optical film for high efficacy and excellent glare control. Suitable for offices where aesthetics is important. Ceiling recessed 300x300mm, White colour - RAL9010. DALI dimmable, 4000K Warm White LED, CRI>80, chromaticity tolerance of 3-step MacAdam ellipse. Lumen package of 1350 lm, total power consumption 12W, efficacy 113lm/W. Lifespan 67,000 hours L90B10. UGR<19. IK07, IP20. Electrical protection: Class II. Glow wire test 850°C.

### Product Overview

<b>Product name</b>	PIXER RECESSED 325X325 HO 1P 4000K DALI
<b>Technology</b>	LED
<b>Housing</b>	Steel
<b>Mount</b>	Ceiling recessed mounting
<b>Fixture rating</b>	Enclosed
<b>General application</b>	Education, Hospitality, Office
<b>ETIM Class</b>	EC002892
<b>Fixture luminous flux (lm)</b>	1350
<b>Luminaire efficacy (lm/W)</b>	113
<b>LOR (%)</b>	100
<b>Correlated colour temperature (k)</b>	4000
<b>Light colour</b>	Neutral White
<b>CRI (Ra)</b>	80
<b>Colour Variation Initial (SDCM)</b>	3
<b>Glare control</b>	< 19
<b>Photobiological Risk Group</b>	RG0
<b>Total power consumption (W)</b>	12
<b>Electrical protection</b>	Class II

Concord  
by SYLVANIA


# Concord

PIXER RECESSED 325X325 HO 1P 4000K DALI

**2069342**

<b>Control gear type</b>	Electronic ballast
<b>Control gear mounting</b>	Remote
<b>Dimmable</b>	Yes
<b>Housing colour</b>	RAL9016
<b>IP rating</b>	IP20
<b>IK rating</b>	IK07
<b>Product EAN number</b>	5025768693429
<b>Warranty</b>	5 years
<b>Dimming method</b>	DALI

## Photometry

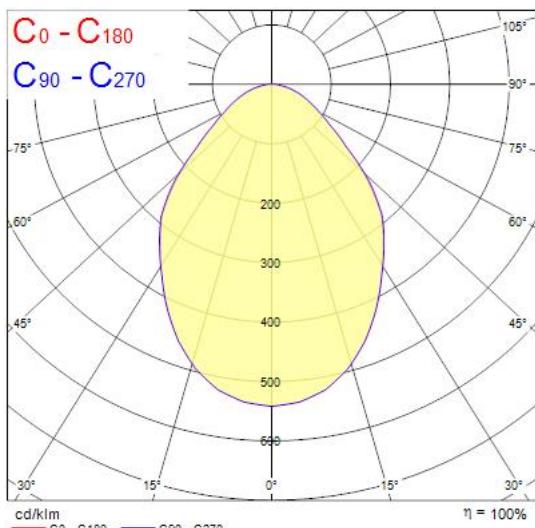

## Technical drawings

