

## Data Sheet | Item Number: 713-1472/107-000

THT male header, 2-row; 0.8 x 0.8 mm solder pin; straight; 100% protected against mismatching; with orientation nose; Threaded flange; Pin spacing 3.5 mm; 24-pole; black





<https://www.wago.com/713-1472/107-000>



Color: ■ black

Similar to illustration

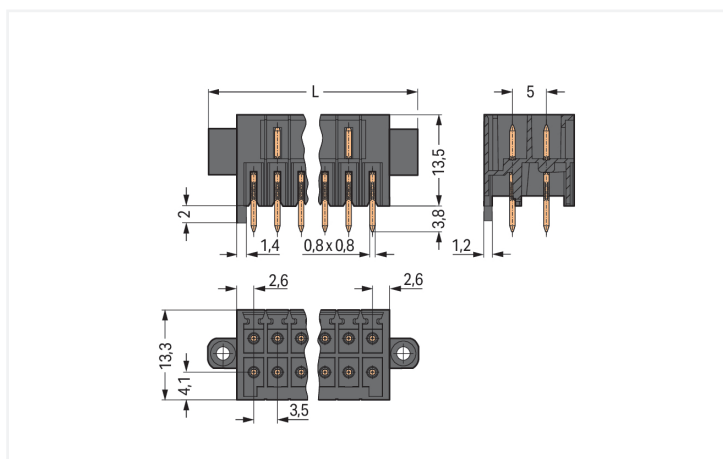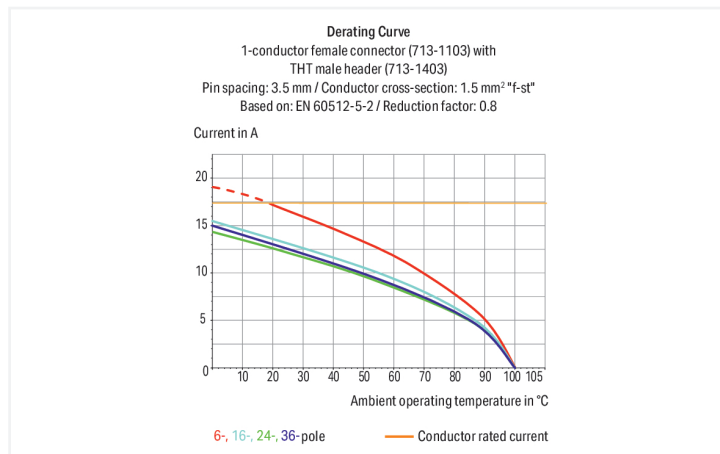

Dimensions in mm

$L = [(pole\ no./2) - 1] \times pin\ spacing + 13.6\ mm$

Male connector, 713 Series, solder pin dimensions 0.8 x 0.8 mm

Our male connector (item number 713-1472/107-000) ensures effortless electrical installations. The item's dimensions are (52.1 x 17.3 x 13.3) mm (width x height x depth).

The contact surface is coated with tin. The pcb connector is designed for THT soldering.

## Notes

## Safety Information

The MCS – MULTI CONNECTION SYSTEM includes connectors without breaking capacity in accordance with DIN EN 61984. When used as intended, these connectors must not be connected/disconnected when live or under load. When used as intended, these connectors must not be connected/disconnected when live or under load. The circuit design should ensure header pins, which can be touched, are not live when unmated.

## Variants:

Other pole numbers  
Other solder pin lengths  
Gold-plated or partially gold-plated contact surfaces  
Other versions (or variants) can be requested from WAGO Sales or configured at <https://configurator.wago.com/>.

## Electrical data

Ratings per	IEC/EN 60664-1			Approvals per	UL 1059		
Overvoltage category	III	III	II	Use group	B	C	D
Pollution degree	3	2	2	Rated voltage	150 V	50 V	-
Nominal voltage	80 V	160 V	250 V	Rated current	10 A	10 A	-
Rated impulse withstand voltage	2.5 kV	2.5 kV	2.5 kV				
Rated current	10 A	10 A	10 A				

Approvals per	CSA		
Use group	B	C	D
Rated voltage	150 V	-	-
Rated current	12 A	-	-

## Connection Data

Total number of potentials	24	<b>Connection 1</b>	
Number of connection types	1	Pole number	24
Number of levels	2		

## Physical data

Pin spacing	3.5 mm / 0.138 inches
Width	52.1 mm / 2.051 inches
Height	17.3 mm / 0.681 inches
Height from the surface	13.5 mm / 0.531 inches
Depth	13.3 mm / 0.524 inches
Solder pin length	3.8 mm
Solder pin dimensions	0.8 x 0.8 mm
Drilled hole diameter with tolerance	1.2 <sup>(+0.1)</sup> mm

## Mechanical data

Variable coding	Yes
Anti-rotation protection	Yes

### Plug-in connection

Contact type (pluggable connector)	Male connector/plug
Connector (connection type)	for PCB
Mismating protection	Yes
Mating direction to the PCB	90 °
Locking of plug-in connection	Threaded flange

### PCB contact

PCB contact	THT
Solder pin arrangement	over the entire male connector (in-line)
Number of solder pins per potential	1

### Material data

Note (material data)	<a href="#">Information on material specifications can be found here</a>
Color	black
Material group	I
Insulation material (main housing)	Polyphthalamide (PPA GF)
Flammability class per UL94	V0
Contact material	Electrolytic copper (E <sub>Cu</sub> )
Contact Plating	Tin
Fire load	0.134 MJ
Weight	6.8 g

### Environmental requirements

Limit temperature range	-60 ... +100 °C
Processing temperature	-35 ... +60 °C

### Commercial data

Product Group	3 (Multi Conn. System)
PU (SPU)	25 pcs
Packaging type	Box
Country of origin	PL
GTIN	4045454809508
Customs tariff number	85366930000

### Product Classification

UNSPSC	39121409
eCl@ss 10.0	27-44-04-02
eCl@ss 9.0	27-44-04-02
ETIM 9.0	EC002637
ETIM 10.0	EC002637
ECCN	NO US CLASSIFICATION

## Environmental Product Compliance

RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c)
SCIP notification number (Austria)	b0567ca9-8e66-4e68-a485-7de3acc1aa89
SCIP notification number (Belgium)	3365dfd4-df8d-4fca-9736-9368dd64683c
SCIP notification number (Bulgaria)	cf1ba5af-55d0-4ebc-af8b-d93da02a185d
SCIP notification number (Czech Republic)	80c640cb-f2f8-4214-9271-85c94774cbc4
SCIP notification number (Denmark)	76d7e1e1-5e4e-4ae6-82e4-1496e783a5e5
SCIP notification number (Finland)	881bd2d9-d607-4468-9d56-f128a744f810
SCIP notification number (France)	81a81358-3710-471f-9f1b-5d12407653d5
SCIP notification number (Germany)	bd63567b-d64a-4935-b40b-5609d6c16fcf
SCIP notification number (Hungary)	f5a23a98-44c6-4435-bf9d-528a4d22bf9e
SCIP notification number (Italy)	7103c914-4920-4415-982f-10f4987de86e
SCIP notification number (Netherlands)	15389dc7-bcc1-463e-9662-8cf74d1c53da
SCIP notification number (Poland)	9e96a01c-0adf-47b1-af6d-772f567abec8
SCIP notification number (Romania)	abeffd62-df7a-4fab-88fc-b166610a1c30
SCIP notification number (Sweden)	0386cad8-3f62-4f33-a229-fc148d7b69b6

## Approvals / Certificates

### General approvals



Approval	Standard	Certificate Name
CB DEKRA Certification B.V.	IEC 61984	NL-102427
CSA CSA Group	C22.2	2315087
KEMA/KEUR DEKRA Certification B.V.	EN 61984	71-133740

## Downloads

### Environmental Product Compliance

#### Compliance Search

Environmental Product Compliance 713-1472/107-000	↓
--	---

## Documentation

### Additional Information

Technical Section	03.04.2019	pdf 2027.26 KB	↓
-------------------	------------	-------------------	---

## CAD/CAE-Data

### CAD data

2D/3D Models  
713-1472/107-000



### CAE data

ZUKEN Portal  
713-1472/107-000



## PCB Design

Symbol and Footprint  
via SamacSys  
713-1472/107-000



Symbol and Footprint  
via Ultra Librarian  
713-1472/107-000



## 1 Compatible Products

### 1.1 System counterpart

#### 1.1.1 Female connector/socket



##### Item No.: [713-1112/107-000](#)

1-conductor female connector, 2-row; CA-GE CLAMP®; 1.5 mm<sup>2</sup>; Pin spacing 3.5 mm; 24-pole; 100% protected against mismatching; Screw flange; black

## 1.2 Optional Accessories

### 1.2.1 Coding

#### 1.2.1.1 Coding




##### Item No.: [714-101](#)

Coding key; orange

## Installation Notes

### Coding



Coding a male header by inserting a coding pin.