


Walraven RapidStrut® Ball Swivel Hanger

(H2475)

for flexible connections and pipe movement

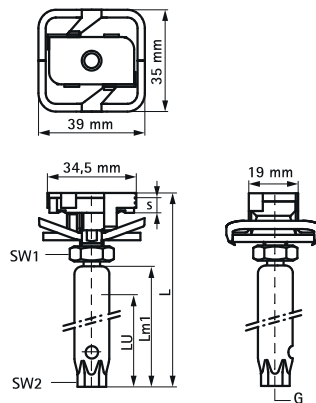

Features & benefits

- slide nut with ball swivel hanger, washer and Walraven RapidStrut® spring
- recommended for metal pipes up to DN 50, plastic pipes up to DN 100
- ready-to-use pre-assembled for a quick fixing, and retains assembly in place before final tightening
- with inspection hole to check screw-in depth (attention: when the threaded rod is screwed-in too deep, the ball swivel is blocked)
- screw-in depth is continuously variable (see LU)
- material: metal parts made of steel 1.0332; spring(s) made of POM (polyoxymethylene), green
- zinc plated
- tested for fire safety according to EN 1363-1
- Always use 2 ball swivel hangers and secure by additional hexagon nut (see application picture).
- The maximum length change that can be dealt with, depends on the fixing distance (ceiling - pipe). The height difference that occurs as a result, needs to be taken into consideration.
- To be used in combination with Walraven Ball Swivel Hangers.

Product Number	For Rail Type	Thread Size	Thread Length	Usable Length	Maximum Allowed Load Faz	Total Width x Total Height x Total Depth
Reference letter		TS	TL	LU	Fa,z	W x H x DtT
Unit description			mm	mm	N	mm x mm x mm
66530805	41x21, 41x41, 41x51, 41x62, 41x82	M8	50	37.5	3,100	43.2 x 80 x 40.8
66530005	41x21, 41x41, 41x51, 41x62, 41x82	M10	50	43	3,100	43.2 x 80 x 40.8