


## Walraven RapidStrut® Base Plate G2 (BUP1000)

(H1203)

base foot to connect fixing rails

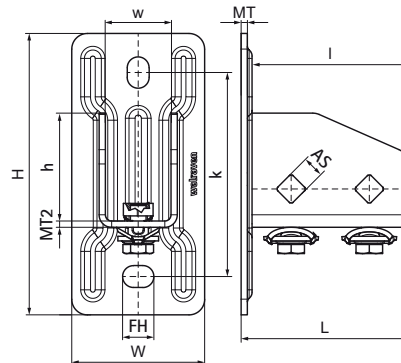

### Features & benefits

- flexible base plate for Walraven RapidStrut® rails
- suitable for all Walraven RapidStrut® rail up to 82mm height
- open side of rails 41x41 can be turned to all sides
- at high loads we advise to install with throughbolts
- timesaving with pre-assembled fasteners
- material: metal parts made of steel 1.0332; spring(s) made of POM (polyoxymethylene), green
- product is part of the Walraven Walraven UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- tested for fire safety according to EN 1366-1



| Product Number   | For Rail Type                     | Total Height | Total Width | Total Length | Width | Height | Length | Heart To Heart Distance | Anchoring Slot | Fixing Hole | Material Thickness | Material Thickness 2 | Maximum Allowed Load Faz |
|------------------|-----------------------------------|--------------|-------------|--------------|-------|--------|--------|-------------------------|----------------|-------------|--------------------|----------------------|--------------------------|
| Reference Letter |                                   | H            | W           | L            | w     | h      | l      | k                       | AS             | FH          | MT                 | MT2                  | F <sub>0,z</sub>         |
| Unit description |                                   | mm           | mm          | mm           | mm    | mm     | mm     | mm                      | mm             | mm          | mm                 | mm                   | N                        |
| 665885400        | 41x21, 41x41, 41x51, 41x62, 41x82 | 180          | 85          | 107          | 42    | 69     | 100    | 130.5                   | 20x14          | 13.8        | 4.00               | 4                    | 3,636                    |