

## SylBay - Accessories

### SYLBAY GEN II EM KIT ESCAPE ROUTE

#### 0040030



#### Product features

- Sylbay Gen II EM Kit Escape Route provides a simple conversion of High Bay fitting with a high performance self-contained LED emergency luminaire KIT suitable for escape routes, delivering 3 hours rated emergency output. Self testing with DALI monitoring capability. Supplied with all mounting accessories



### PRODUCT OVERVIEW

Product name	SYLBAY GEN II EM KIT ESCAPE ROUTE
Technology	LED
General application	Logistics & Industry
ETIM Class	EC002556
Warranty	3 years
Fixture luminous flux (lm)	217
CRI (Ra)	75
Photobiological Risk Group	RG1
Luminous flux (emergency) (lm)	200
Electrical protection	Class II
Housing colour	White
IP rating	IP65
IK rating	IK03
Product EAN number	5410288400303

### DATA TABLE

#### General data

Product name	SYLBAY GEN II EM KIT ESCAPE ROUTE
Technology	LED
General application	Logistics & Industry
ETIM Class	EC002556
Warranty	3 years

#### Optical data

Fixture luminous flux (lm)	217
CRI (Ra)	75
Photobiological Risk Group	RG1
Luminous flux (emergency) (lm)	200
Emergency duration (h)	3

#### Electrical data

Lamp power factor	0.44
-------------------	------

## SylBay - Accessories

### SYLBAY GEN II EM KIT ESCAPE ROUTE

### 0040030

Electrical protection Class II


#### Physical data

Housing colour	White
IP rating	IP65
IK rating	IK03
Weight (kg)	1.1

#### Packaging

Single packaging type	Carton
Product EAN number	5410288400303
Packaging single length / height (cm)	32.5
Packaging single width (cm)	32.5
Packaging single depth (cm)	12.5
DUN14 (outer)	05410288400303
Units per outer package	1
Packaging outer length / height (cm)	32.5
Packaging outer width (cm)	32.5
Packaging outer depth (cm)	12.5

## PHOTOMETRY

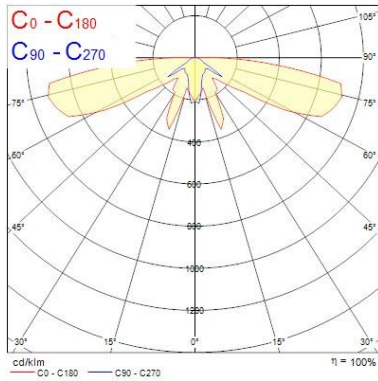

Distance [m]	Cone diameter [m]	E(0°)	E(C90)	E(C0)	Illuminance [lx]
0.5	1.55 12.16	183	14	0	0
1.0	3.10 24.33	45	3	0	0
1.5	4.65 36.49	18	1	0	0
2.0	6.21 48.65	10	1	0	0
2.5	7.76 60.82	7	1	0	0
3.0	9.31 72.99	5	0	0	0

Distance [m]      Cone diameter [m]      Illuminance [lx]

— C0 - C180 (Half beam angle: 170.6°)      — C90 - C270 (Half beam angle: 114.4°)