

Features

• Logistics and Industry modular high bay luminaire with wide optics to provide homogenous light distribution for open space areas. Single body with 2 optical modules, 9100 lumens, 57W, 160lm/W, 4000K, CRI 80, wide beam optic, DALI dimmable, 3 step MacAdam ellipse, grey finish (RAL7012), Class 1, 220-240V, IP65, IK08, (LxWxH) 410x386x133mm, Mains + control cable of 2 meter. Ball-impact-resistance according to VDE 0710-13 in suspended mounting mode.


Product Overview

|                                 |                                  |
|---------------------------------|----------------------------------|
| Product name                    | Sylbay 4000K L2 9000LM WIDE DALI |
| Technology                      | LED                              |
| Cap/Base                        | N/A                              |
| Housing                         | Aluminium                        |
| Mount                           | Suspended                        |
| Fixture rating                  | Enclosed                         |
| Fixture luminous flux (lm)      | 9100                             |
| Luminaire efficacy (lm/W)       | 160                              |
| LOR (%)                         | 100                              |
| Colour temperature (K)          | 4000                             |
| Light colour                    | Neutral White                    |
| CRI (Ra)                        | 80                               |
| Colour Consistency (SDCM)       | 3                                |
| Colour Variation Initial (SDCM) | 3                                |
| Glare control                   | < 20                             |
| Photobiological Risk Group      | RG1                              |
| Total power consumption (W)     | 57                               |
| Electrical protection           | Class I                          |
| Control gear type               | Electronic ballast               |

Sylbay 4000K L2 9000LM WIDE DALI  
0040302

|                       |               |
|-----------------------|---------------|
| Control gear mounting | Integral      |
| Housing colour        | Grey          |
| IP rating             | IP65          |
| IK rating             | IK08          |
| Product EAN number    | 5410288403021 |
| Warranty              | 5 years       |

Photometry

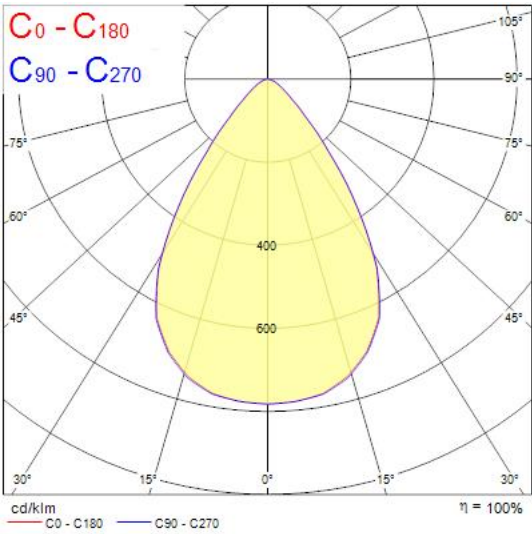

Technical drawings

