

Start Surface IP66 Ø350mm DALI
START SURFACE IP66 1500LM 840 IK10 DALI EM3 BLK
0049252



Product features

- LED exterior surface mounted luminaire, 350mm diameter, 1500lm as max. lumen output, 17W max. power consumption, 88lm/W efficacy, 4000K color temperature, CRI80, IP66, IK10, 60,000 hours (L70), black housing, vandal resistant. DALI and DALI 2 dimming compatibility. Integrated emergency, 3 hours, supplied with anti-theft screws




PRODUCT OVERVIEW

Product name	START SURFACE IP66 1500LM 840 IK10 DALI EM3 BLK
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
Environment	Indoor, Outdoor
General application	Hospitality
ETIM Class	EC002892
Warranty	5 years
Useful luminous flux (Fuse)	1500
Fixture luminous flux (lm)	1500
Luminaire efficacy (lm/W)	89
LOR (%)	100
Correlated colour temperature (k)	4000
Colour Code	840
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	120
Glare control	< 25
Photobiological Risk Group	RG0
Total power consumption (W)	17
Electrical protection	Class II
Control gear type	LED driver constant current
Control gear mounting	Integrated
Dimmable	Yes
Dimming method	DALI
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9011 - Graphite black
IP rating	IP66
IK rating	IK10
Product EAN number	5410288492520

Start Surface IP66 Ø350mm DALI
START SURFACE IP66 1500LM 840 IK10 DALI EM3 BLK
0049252

PHOTOMETRY

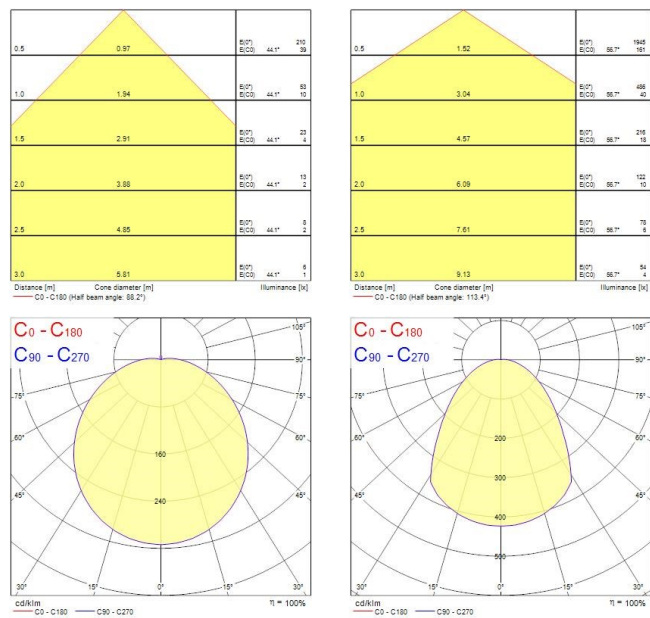

TECHNICAL DRAWINGS

