

Features

- LED mirror/cabinet light with 8W total power consumption, 560 lumen, 110° beam angle, IP44, IK03, CRI 80, 4000K colour temperature, 400 mm length, 2 year warranty. Slim shape.

Product Overview


Product name	SYLMIRROR LED SLIM IP44 NW
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Wall surface mounted
Fixture rating	Enclosed
General application	Residential & Consumer
ETIM Class	EC002892
E-number FI	4170555
E-number SE	7505161
Fixture luminous flux (lm)	560
Luminaire efficacy (lm/W)	70
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Photobiological Risk Group	RG0
Total power consumption (W)	8

Light your world


SYLMIRROR LED SLIM IP44 NW 0043213

Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
Housing colour	Chrome
IP rating	IP44
IK rating	IK03
Product EAN number	5410288432137
Warranty	2 years
Dimming method	N/A

Photometry

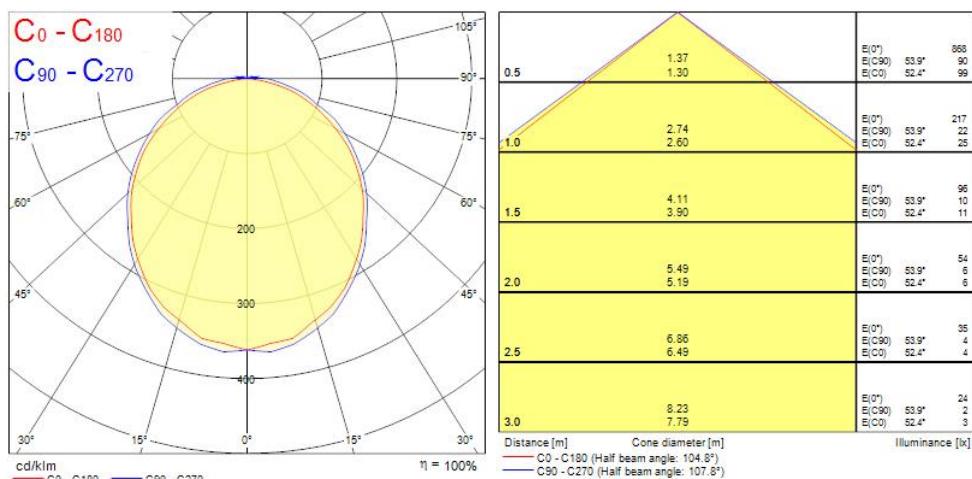

Technical drawings

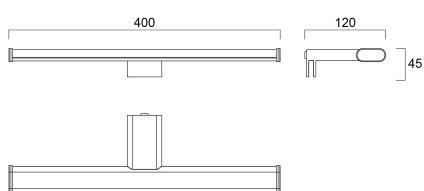

Data table

Light your world



SYLMIRROR LED SLIM IP44 NW 0043213

GENERAL DATA


Product name	SYLMIRROR LED SLIM IP44 NW
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Wall surface mounted
Fixture rating	Enclosed
General application	Residential & Consumer
Operating temperature range (°C)	-10°C...+45°C
Performance ambient temperature T _q (°C)	25
ETIM Class	EC002892
E-number FI	4170555
E-number SE	7505161
Warranty	2 years

OPTICAL DATA

Fixture luminous flux (lm)	560
Luminaire efficacy (lm/W)	70
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Distribution type	Symmetric
Photobiological Risk Group	RG0

ELECTRICAL DATA

Total power consumption (W)	8
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.5

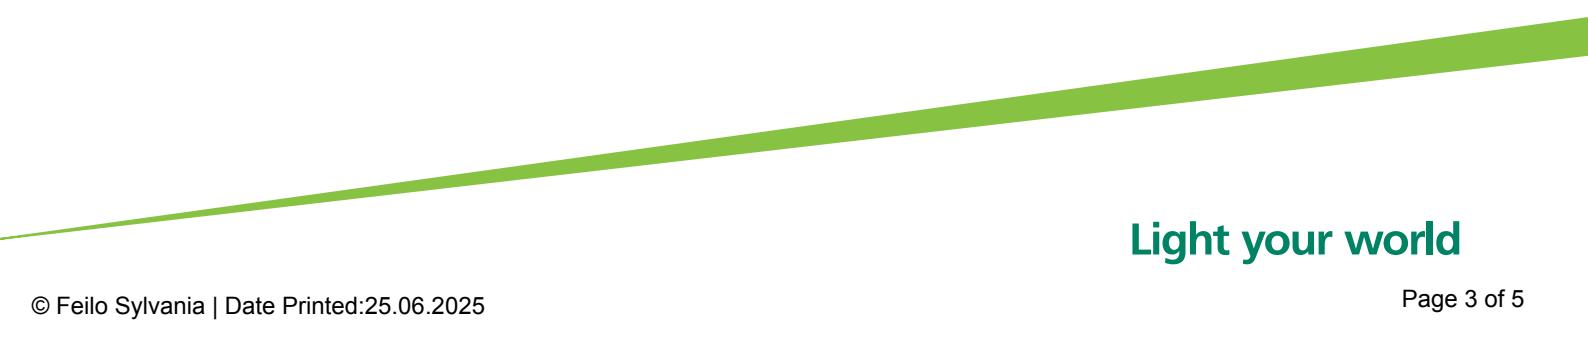

Light your world

SYLMIRROR LED SLIM IP44 NW 0043213

THD (at 230 V, 50 Hz, full load, at 100% dimming level) \leq xx.x %

100

Electrical protection

Class II

Control gear required

No

Control gear type

LED driver constant current

Dimmable

No

Dimming method

N/A

Drive current (mA)

60

Inrush Current (A)

2

Inrush Duration (μs)

50

Energy Efficiency Class (A->G) of contained light source

E

Nominal Frequency (Hz)

50/60Hz

Max. products per 10A C Breaker

100

Max. products per 16A C Breaker

200

Max. products per 16A B Breaker

200

Connectable conductor cross section -

1.5

Max (mm²)

LIFETIME DATA

Lifespan L70 B50 25000

PHYSICAL DATA

Housing colour Chrome

IP rating IP44

IK rating IK03

Diffuser finish Opal

Diffuser material PC Polycarbonate

Nominal Product Length (mm) 400

Nominal Product Width (mm) 120

Nominal Product Height (mm) 45

Weight (kg) 0.206

PACKAGING

Light your world

SYLMIRROR LED SLIM IP44 NW 0043213

Product EAN number	5410288432137
Packaging single length / height (cm)	41.0
Packaging single width (cm)	13.2
Packaging single depth (cm)	5.5
DUN14 (inner)	15410288432134
Units per outer package	6
Packaging outer length / height (cm)	43.0
Packaging outer width (cm)	42.0
Packaging outer depth (cm)	13.5

SAFETY DATA

Glow Wire Test (°C)	650
Optimal operating condition (°C)	-10-45
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No