


Syl-lighter LED II 240

Syl-Lighter LED II 240 RO 25W WW
3031824



Product features

- Ceiling recessed IP44 from the front LED downlight, perfect where limited ceiling void is available with only 65mm product depth and 225mm cutout. Ideal replacement for 2x26W CFL downlights. The polycarbonate diffuser allows for a wider light distribution and increased spacings between luminaires. Loop in loop out connector allows for quick installation. Die-cast aluminium body, 2071LM, 25W, 83lm/W, 3000K, Driver Current: 632mA, CRI80, 74° beam angle, Non-dimmable LED driver, IP44 from the front, IK07, (HxW) 65x225mm, 0.65kg, RAL9003, Class 2, 220-240V,

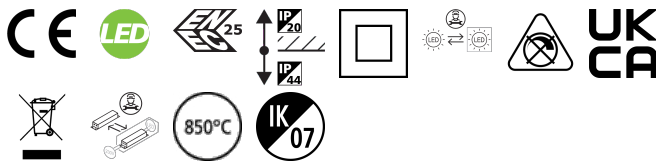

PRODUCT OVERVIEW

Product name	Syl-Lighter LED II 240 RO 25W WW
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	Interior
General application	Hospitality
ETIM Class	EC001744
E-number FI	4271265
E-number SE	7467175
Warranty	5 years
Fixture luminous flux (lm)	2071
Luminaire efficacy (lm/W)	83
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Beam Angle (°)	74
Glare control	< 23
Photobiological Risk Group	RG0
Total power consumption (W)	25
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP44/20
IK rating	IK07
Product EAN number	8711971318248

Syl-lighter LED II 240


Syl-Lighter LED II 240 RO 25W WW
3031824

PHOTOMETRY

0.5	0.78 0.77	E(0°) E(C90) E(C180)	4325 1197 1196
1.0	1.55 1.55	E(0°) E(C90) E(C180)	1206 299 297
1.5	2.33 2.32	E(0°) E(C90) E(C180)	808 133 133
2.0	3.10 3.09	E(0°) E(C90) E(C180)	611 70 70
2.5	3.88 3.86	E(0°) E(C90) E(C180)	461 48 48
3.0	4.65 4.64	E(0°) E(C90) E(C180)	354 38 38

Distance [m] Core diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 75.4°)
— C90 - C270 (Half beam angle: 75.4°)



TECHNICAL DRAWINGS

