



### Features

- Ceiling recessed IP44 from the front LED downlight, perfect where limited ceiling void is available with only 65mm product depth and 225mm cutout. Ideal replacement for 2x26W CFL downlights. The polycarbonate diffuser allows for a wider light distribution and increased spacings between luminaires. Loop in loop out connector allows for quick installation. Die-cast aluminium body, 2071LM, 25W, 83lm/W, 3000K, Driver Current: 632mA, CRI80, 74° beam angle, Non-dimmable LED driver, IP44 from the front, IK07, (HxW) 65x225mm, 0.65kg, RAL9003, Class 2, 220-240V,

### Product Overview


Product name	Syl-Lighter LED II 240 RO 25W WW
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	Interior
E-number FI	4271265
E-number SE	7467175
Fixture luminous flux (lm)	2071
Luminaire efficacy (lm/W)	83
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	5
Glare control	< 23
Photobiological Risk Group	RG0
Total power consumption (W)	25
Electrical protection	Class II

# Lumiance


## Syl-Lighter LED II 240 RO 25W WW 3031824

Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP44/20
IK rating	IK07
Product EAN number	8711971318248
Warranty	5 years

### Photometry

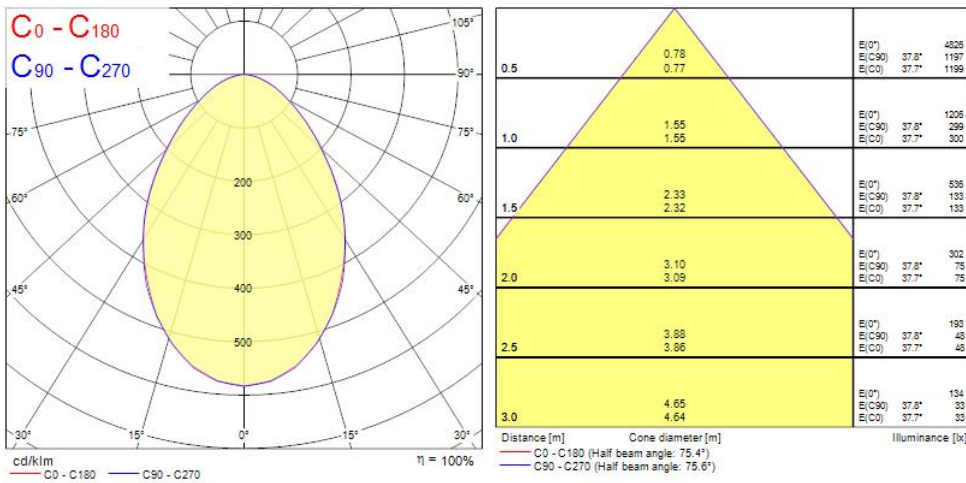

### Technical drawings

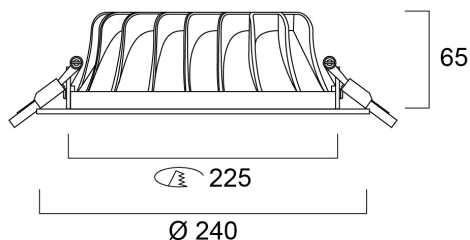

### Data table

#### GENERAL DATA

Product name	Syl-Lighter LED II 240 RO 25W WW
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	Interior
Operating temperature range (°C)	-10°C...+25°C
Performance ambient temperature Tq (°C)	25
E-number FI	4271265
E-number SE	7467175
Warranty	5 years

#### OPTICAL DATA

Fixture luminous flux (lm)	2071
Luminaire efficacy (lm/W)	83
LOR (%)	100

## Syl-Lighter LED II 240 RO 25W WW 3031824

Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	5
Adjustable chromaticity	N
Glare control	< 23
Photobiological Risk Group	RG0

### ELECTRICAL DATA

Total power consumption (W)	25
Lamp power factor	0.9
Electrical protection	Class II
Control gear required	No
Control gear type	LED driver constant current
Drive current (mA)	630
Inrush Current (A)	6.44
Inrush Duration ( $\mu$ s)	830
Glow Wire Test ( $^{\circ}$ C)	850
Energy Efficiency Class (A->G) of contained light source	F
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	20
Max. products per 20A B Breaker	24

### LIFETIME DATA

Lifespan L70 B50	100000
Lifespan L80 B20	74000
Lifespan L90 B10	34000

### PHYSICAL DATA

Housing colour	RAL 9003 - Signal white
IP rating	IP44/20
IK rating	IK07

# Lumiance

## Syl-Lighter LED II 240 RO 25W WW 3031824

Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Nominal Product Diameter (mm)	240
Weight (kg)	0.81
Recessed Depth (mm)	150

### PACKAGING

Single packaging type	Carton
Product EAN number	8711971318248
Packaging single width (cm)	27.0
Packaging single depth (cm)	8.0
DUN14 (outer)	18711971318245
Packaging outer length / height (cm)	56.2

### SAFETY DATA

Optimal operating condition (°C)	-10-25
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No