


START Panel Flat UGR19 600x600 3500Lm 840
0047227

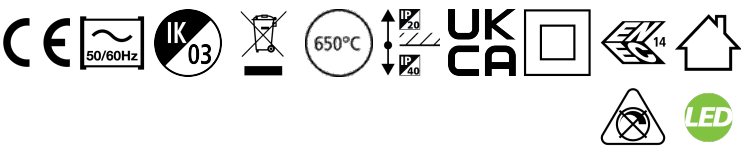

Features

- Edge lit LED flat panel with low glare (UGR<19). Low Flicker, 35 W, Neutral White, 4000 K, 3500 lumens, 100 lm/W, Average lifespan: 120.000Hrs, prismatic diffuser, aluminium frame, steel body, electronic non dimmable driver. (HxWxD) 9.5 x 595 x 595 mm


Product Overview

Product name	START Panel Flat UGR19 600x600 3500Lm 840
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed mounting, Ceiling surface mounting, Suspended
Environment	Interior
General application	Education, Office
ETIM Class	EC002892
E-number FI	4276948
Fixture luminous flux (lm)	3, 500
Luminaire efficacy (lm/W)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	5
Beam Angle (°)	90
Glare control	< 19
Photobiological Risk Group	RG0
Total power consumption (W)	35
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No

START Panel Flat UGR19 600x600 3500Lm 840
0047227


LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9003
IP rating	IP40/20
IK rating	IK03
Product EAN number	5410288472270
Warranty	5 years
Dimming method	N/A

Photometry

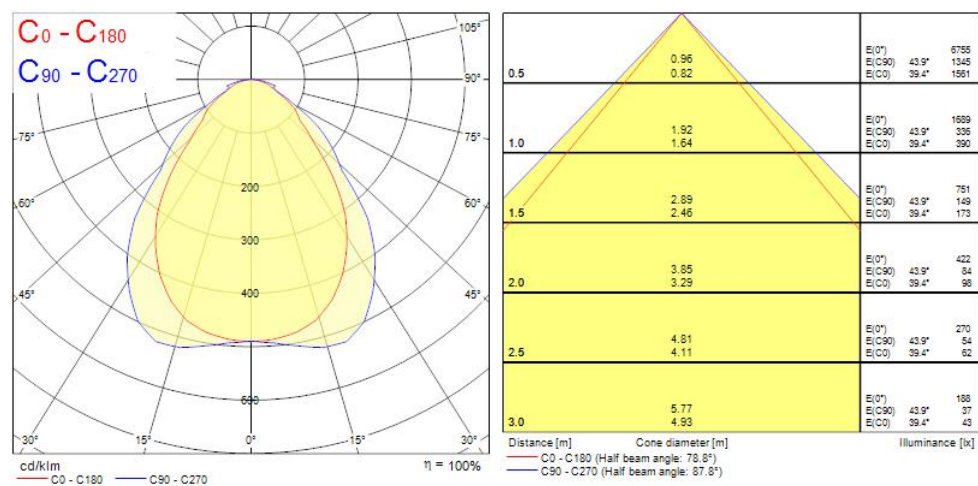

START Panel Flat UGR19 600x600 3500Lm 840
0047227

Technical drawings

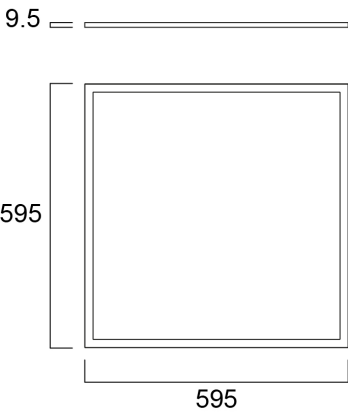

Data table

GENERAL DATA

Product name	START Panel Flat UGR19 600x600 3500Lm 840
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed mounting, Ceiling surface mounting, Suspended
Environment	Interior
General application	Education, Office
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
E-number FI	4276948
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	3, 500
----------------------------	--------

START Panel Flat UGR19 600x600 3500Lm 840 0047227

Luminaire efficacy (lm/W)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	5
Beam Angle (°)	90
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG0

ELECTRICAL DATA

Total power consumption (W)	35
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	1
THD (at 230 V, 50 Hz, full load, at 100% dimming level) < xx.x %	15.0
Electrical protection	Class II
Control gear required	No
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
Drive current (mA)	930
Inrush Current (A)	10
Inrush Duration (µs)	100
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	60
Max. products per 13A C Breaker	75
Max. products per 16A C Breaker	95
Max. products per 20A C Breaker	120

LIFETIME DATA



START Panel Flat UGR19 600x600 3500Lm 840
0047227

Lifespan L70 B50	120000
------------------	--------

PHYSICAL DATA

Housing colour	RAL9003
IP rating	IP40/20
IK rating	IK03
Diffuser finish	Prismatic
Nominal Product Length (mm)	595
Nominal Product Width (mm)	595
Nominal Product Height (mm)	9.5
Weight (kg)	2.653
Recessed Depth (mm)	38

PACKAGING

Product EAN number	5410288472270
Packaging single length / height (cm)	63.0
Packaging single width (cm)	4.4
Packaging single depth (cm)	67.5
DUN14 (inner)	15410288472277
Units per outer package	2
Packaging outer length / height (cm)	65.0
Packaging outer width (cm)	10.8
Packaging outer depth (cm)	69.5

SAFETY DATA

Glow Wire Test (°C)	650
Optimal operating condition (°C)	-20-40
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No