


Features

- Sylmaster T8 Christmas Tree Louvre (LS) - Electronic Ballast

Product Overview

|                             |                             |
|-----------------------------|-----------------------------|
| Product name                | T26 2x58W G13               |
| Technology                  | Fluorescent                 |
| Cap/Base                    | G13                         |
| Housing                     | Steel                       |
| Mount                       | Ceiling surface mounting    |
| Light source included       | Fixture without Lightsource |
| Environment                 | Interior                    |
| Fixture luminous flux (lm)  | 6100                        |
| Luminaire efficacy (lm/W)   | 55                          |
| LOR (%)                     | 61                          |
| Light colour                | N/A                         |
| Total power consumption (W) | 110                         |
| Electrical protection       | Class I                     |
| Control gear type           | Electronic ballast          |
| Control gear mounting       | Integral                    |
| Housing colour              | White                       |
| IP rating                   | IP20                        |
| IK rating                   | IK02                        |
| Product EAN number          | 5410288550886               |
| Warranty                    | 2 years                     |


Photometry

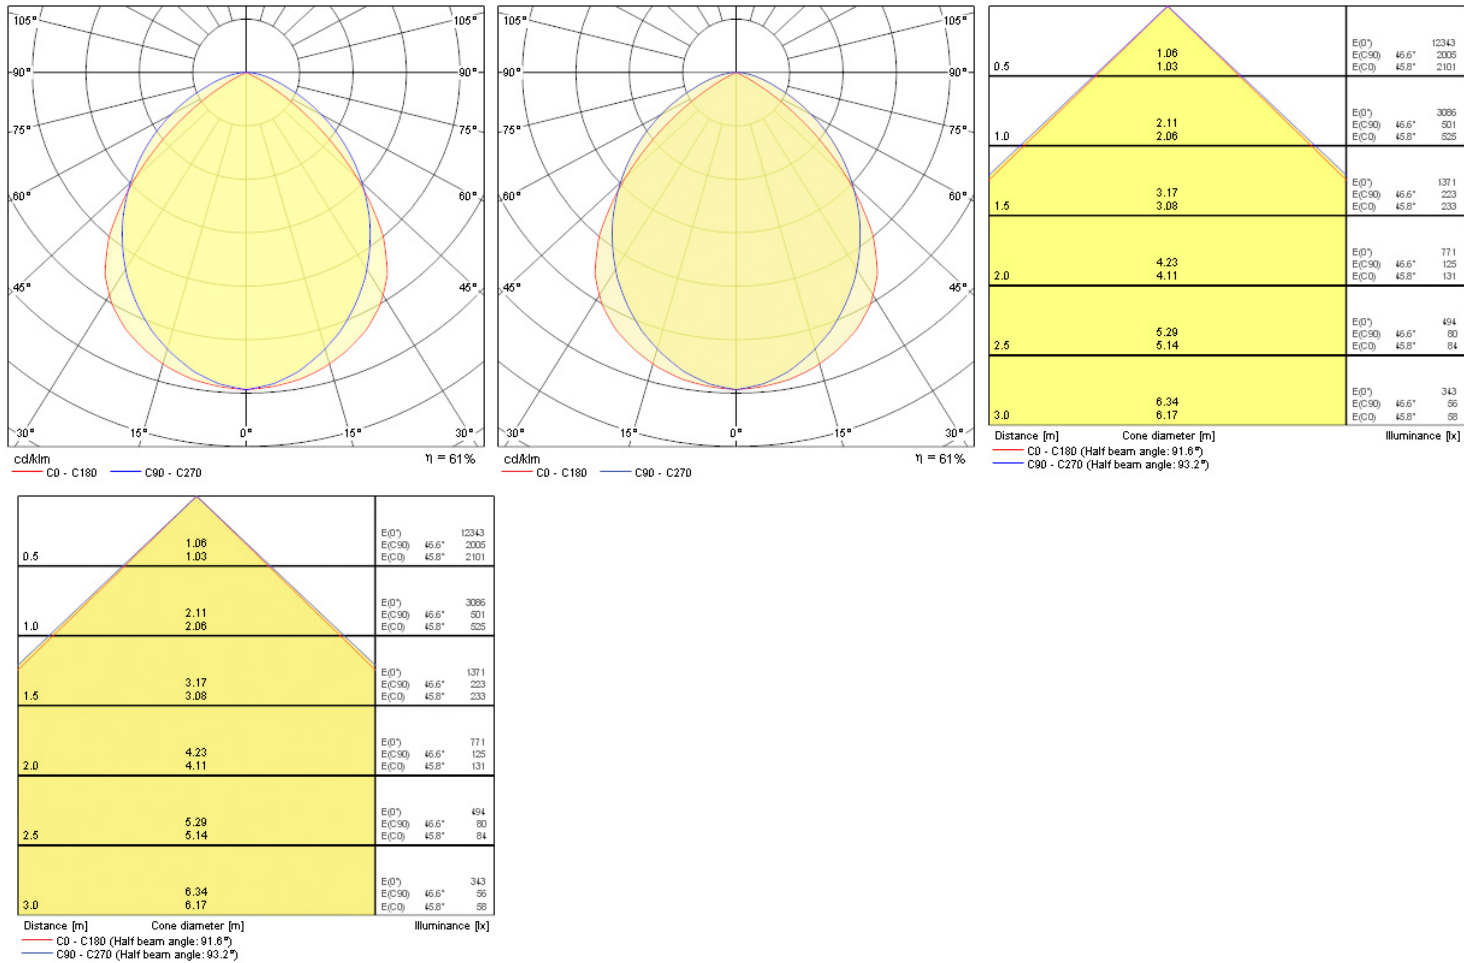

T26 2x58W G13  
0055088

Technical drawings

| Dimensions (mm) |      |     |    |      |                    |  |
|-----------------|------|-----|----|------|--------------------|--|
| Lamp            | L    | I   | H  | F    | Heaviest Weight Kg |  |
| 1x36W           | 1250 | 202 | 85 | 1000 | 5.5                |  |
| 1x58W           | 1550 | 202 | 85 | 1000 | 6.5                |  |
| 1x70W           | 1814 | 202 | 85 | 1000 | 7.0                |  |
| 2x36W           | 1250 | 202 | 85 | 1000 | 5.5                |  |
| 2x58W           | 1550 | 202 | 85 | 1000 | 6.5                |  |
| 2x70W           | 1814 | 202 | 85 | 1000 | 7.0                |  |

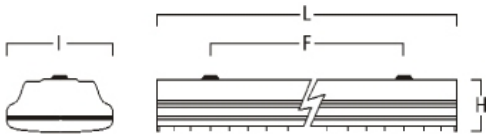

Data table

GENERAL DATA

|              |                          |
|--------------|--------------------------|
| Product name | T26 2x58W G13            |
| Technology   | Fluorescent              |
| Cap/Base     | G13                      |
| Housing      | Steel                    |
| Mount        | Ceiling surface mounting |
| Environment  | Interior                 |
| Warranty     | 2 years                  |

OPTICAL DATA

|                            |      |
|----------------------------|------|
| Fixture luminous flux (lm) | 6100 |
| Luminaire efficacy (lm/W)  | 55   |
| LOR (%)                    | 61   |
| Light colour               | N/A  |
| Adjustable chromaticity    | N    |

ELECTRICAL DATA

|                       |                             |
|-----------------------|-----------------------------|
| Light source included | Fixture without Lightsource |
|-----------------------|-----------------------------|

## T26 2x58W G13 0055088

|                                                    |                    |
|----------------------------------------------------|--------------------|
| Total power consumption (W)                        | 110                |
| Electrical protection                              | Class I            |
| Control gear required                              | No                 |
| Control gear type                                  | Electronic ballast |
| Control gear mounting                              | Integral           |
| Glow Wire Test (°C)                                | 960                |
| Nominal Frequency (Hz)                             | 50/60Hz            |
| Connectable conductor cross section -<br>Min (mm²) | 2.5                |
| Connectable conductor cross section -<br>Max (mm²) | 2.5                |

### PHYSICAL DATA

|                             |       |
|-----------------------------|-------|
| Housing colour              | White |
| IP rating                   | IP20  |
| IK rating                   | IK02  |
| Nominal Product Length (mm) | 1550  |
| Nominal Product Width (mm)  | 202   |
| Weight (kg)                 | 5.08  |

### PACKAGING

|                                      |                |
|--------------------------------------|----------------|
| Single packaging type                | Carton         |
| Product EAN number                   | 5410288550886  |
| Packaging single width (cm)          | 9.0            |
| Packaging single depth (cm)          | 21.0           |
| DUN14 (outer)                        | 05410288550886 |
| Packaging outer length / height (cm) | 155.0          |

### SAFETY DATA

|                                     |    |
|-------------------------------------|----|
| Special purpose lamp                | No |
| Dry applications use only           | No |
| Suitable for household illumination | No |