


## Syl-Lab IP65 600x600 (Recessed)

SYL-LAB LED IP65 RECESSED 36W 4K OPAL 600 DALI

0055313

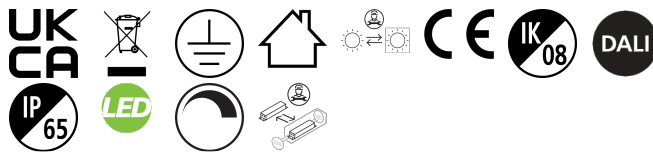


### PRODUCT OVERVIEW

Product name	SYL-LAB LED IP65 RECESSED 36W 4K OPAL 600 DALI
Technology	LED
Housing	Steel
Mount	Ceiling recessed mounting
E-number FI	4306935
Warranty	5 years
Fixture luminous flux (lm)	3950
Luminaire efficacy (lm/W)	110
LOR (%)	100
Colour temperature (K)	4000
Colour Code	840
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 21
Photobiological Risk Group	RG0
Total power consumption (W)	36
Electrical protection	Class I
LED Flickering Rate	Ultra low (5% or less)
Housing colour	White
IP rating	IP65
IK rating	IK08
Product EAN number	5410288553139

### PHOTOMETRY

## Syl-Lab IP65 600x600 (Recessed) SYL-LAB LED IP65 RECESSED 36W 4K OPAL 600 DALI 0055313

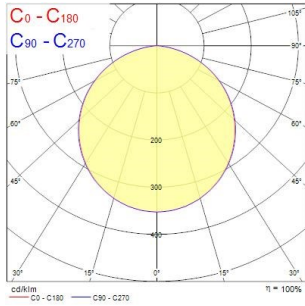

Distance (m)	Cone diameter (m)	E0° (lx)	E(C90) (lx)	E(C0) (lx)
0.5	1.51 1.45	855	87	87
1.0	3.01 2.97	160	19	14
1.5	4.52 4.45	72	8	6
2.0	6.02 5.93	41	5	4
2.5	7.51 7.41	29	4	3
3.0	9.01 8.90	22	3	2

Distance (m)      Cone diameter (m)      Illuminance (lx)

— C0 - C180 (Half beam angle: 112.5°)  
 — C90 - C270 (Half beam angle: 112.5°)

### TECHNICAL DRAWINGS

