
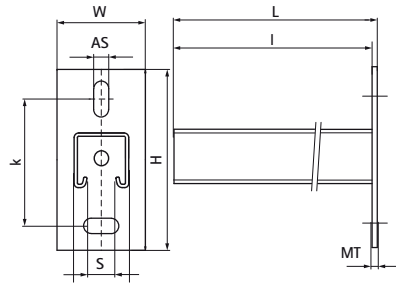


Walraven RapidStrut® Stainless Steel Cantilever Arm

(M5005)

fixing to wall



Features & benefits

- wall plate welded on Walraven RapidStrut® Profile
- slots at 90° to each other to simplify fixing
- CO₂ welded
- inward formed flanges with serrated profile for extra grip
- Type 41x41x2,5 tested for fire safety according EN1363-1
- material: stainless steel 1.4404 (AISI 316)
- for more information about the max. allowed load (Faz) please refer to the loading tables or our online datasheet 'Walraven RapidStrut® Data Sheet'



Product Number	Type	Length	Total Width x Total Height x Total Length	Material Thickness	Anchoring Slot	Profile Opening	Heart To Heart Distance
Reference letter		<i>l</i>	<i>W x H x L</i>	<i>MT</i>	<i>AS</i>	<i>S</i>	<i>k</i>
Unit description		mm	mm x mm x mm	mm	mm	mm	mm
6607861	41x41x2,5	150	48 x 130 x 158	8.00	30x13	22	87.5
6607870	41x41x2,5	200	48 x 130 x 208	8.00	30x13	22	87.5
6607862	41x41x2,5	300	45 x 130 x 308	8.00	30x13	22	87.5
6607874	41x41x2,5	400	48 x 130 x 408	8.00	30x13	22	87.5
6607863	41x41x2,5	450	45 x 130 x 458	8.00	30x13	22	87.5
6607873	41x41x2,5	500	48 x 130 x 508	8.00	30x13	22	87.5
6607864	41x41x2,5	600	45 x 130 x 600	8.00	30x13	22	87.5
6607865	41x41x2,5	750	48 x 130 x 758	8.00	30x13	22	87.5