
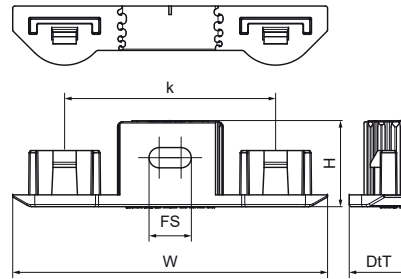


## Walraven starQuick® Duo Wall Plate

(C0520)

for use with Walraven starQuick®



### Features & benefits

- for fixing of two pipes with Walraven starQuick® clamps
- suitable for Walraven starQuick® dimensions up to 20mm
- the distance between the pipe and the wall is equal to that of a single clip
- material: modified PA6 (polyamide), grey or white
- resistant to UV, ageing, oil and petrol
- no corrosion, recyclable, halogen free
- temperature resistance from approx. -40 °C to approx. +90 °C (constant); short to approx. +130 °C
- 0854300 supplied with a hammer-in screw

| Product Number   | Total Height | Total Width | Total Depth | Fixing Slot | Heart To Heart Distance | Colour | Maximum Allowed Load |
|------------------|--------------|-------------|-------------|-------------|-------------------------|--------|----------------------|
| Reference Letter | H            | W           | DtT         | FS          | k                       |        | Fa,z                 |
| Unit description | mm           | mm          | mm          | mm          | mm                      |        | N                    |
| 0854000          | 21           | 75          | 14          | 10x4,8      | 50                      | Grey   | 600                  |
| 0855000          | 21           | 75          | 14          | 10x4,8      | 50                      | White  | 600                  |