
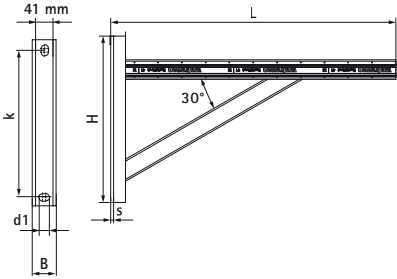


Walraven RapidStrut® Cantilever Arm with Rail Prop

(H0815)

cantilever arm with welded support



Features & benefits

- U-shaped baseplate with welded channel and welded support beam
- strong cantilever arm for applications with higher loads or extra safety required
- CO₂ welded
- inward formed flanges with serrated profile for extra grip
- horizontal profile type RapidStrut 41|M with continous perforation
- material: steel 1.0332
- hot dip galvanized

Product Number	Type	Length	Total Width x Total Height x Total Length	Material Thickness	Anchoring Slot	Profile Opening	Heart To Heart Distance
Reference letter		<i>l</i>	<i>W x H x L</i>	<i>MT</i>	<i>AS</i>	<i>S</i>	<i>k</i>
Unit description		<i>mm</i>	<i>mm x mm x mm</i>	<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>mm</i>
6601894	41 M	569	50 x 350 x 600	4.00	20x13	22	307.5