


## Syl-lighter LED II 240

SYL-LIGHTER II 240 25W NW DALI  
3031848



### Product features

- Ceiling recessed IP44 from the front LED downlight, perfect where limited ceiling void is available with only 65mm product depth and 225mm cutout. Ideal replacement for 2x26W CFL downlights. The polycarbonate diffuser allows for a wider light distribution and increased spacings between luminaires. Die-cast aluminium body, 2408LM, 25W, 96lm/W, 4000K, Driver Current: 650mA, CRI80, 74° beam angle, Dali dimmable LED driver (Tridonic 28000675), IP44 from the front, IK07, (HxW) 65x225mm, 0.65kg, RAL9003, Class 2, 220-240V,

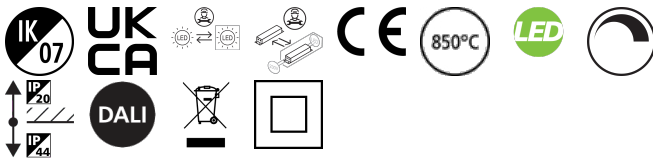


### PRODUCT OVERVIEW

Product name	SYL-LIGHTER II 240 25W NW DALI
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed mounting
Fixture rating	Enclosed
Environment	Interior
General application	Hospitality
ETIM Class	EC001744
E-number FI	4270294
E-number SE	7470974
Warranty	5 years
Fixture luminous flux (lm)	2408
Luminaire efficacy (lm/W)	96
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	5
Beam Angle (°)	74
Photobiological Risk Group	RG0
Total power consumption (W)	25
Electrical protection	Class II
Control gear type	Other
Control gear mounting	Remote
Dimmable	Yes
Dimming method	DALI
Minimum dimming level (%)	1
Housing colour	RAL 9003 - Signal white
IP rating	IP44/20
IK rating	IK07
Product EAN number	8711971318484

## Syl-lighter LED II 240 SYL-LIGHTER II 240 25W NW DALI 3031848

### PHOTOMETRY

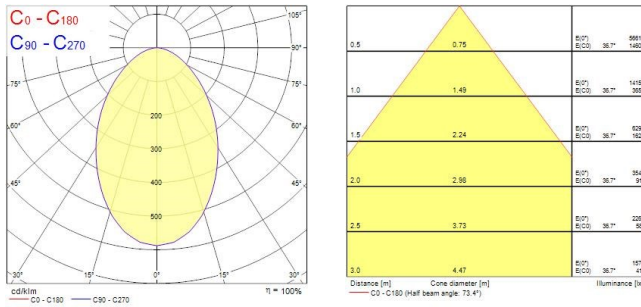

### TECHNICAL DRAWINGS

