



Kop voor lampje Ø22mm, rond glad kapje Groen

ZB4BV03

EAN Code: 3389110889505

Prijs: 5,11 EUR

Hoofd

|                                    |                         |
|------------------------------------|-------------------------|
| range of product                   | Harmony XB4             |
| product or component type          | Kop voor controlelampje |
| compatibiliteit product            | BA 9s                   |
| device short name                  | ZB4                     |
| kraag materiaal                    | Verchroomd metaal       |
| bevestigingsdiameter               | 22 mm                   |
| verkoop per ondeelbare hoeveelheid | 1                       |
| koptype                            | Standaard               |
| vorm van kop signaleringseenheid   | Rond                    |
| kap/operator of lenskleur          | Groen                   |
| extra informatie operator          | Met gewone lens         |

Complementair

|                                |                                                                                           |
|--------------------------------|-------------------------------------------------------------------------------------------|
| CAD totale breedte             | 29 mm                                                                                     |
| CAD totale hoogte              | 29 mm                                                                                     |
| CAD totale diepte              | 31 mm                                                                                     |
| net weight                     | 0,027 kg                                                                                  |
| weerstand hoge druk drukring   | 7000000 Pa bij 55 °C, afstand: 0.1 m                                                      |
| elektrische samenstellingscode | P3 in vooraan gemonteerd met BA 9s<br>P4 in vooraan gemonteerd met BA 9s en transformator |
| product presentatie            | Basisonderdeel                                                                            |

Omgeving

|                                       |                                                     |
|---------------------------------------|-----------------------------------------------------|
| beschermende behandeling              | TH                                                  |
| ambient air temperature for storage   | -40...70 °C                                         |
| ambient air temperature for operation | -40...55 °C                                         |
| overvoltage category                  | Klasse I conforming to IEC 60536                    |
| IP beschermingsgraad                  | IP66 conform aan IEC 60529<br>IP67<br>IP69<br>IP69K |
| NEMA beschermingsgraad                | NEMA 13<br>NEMA 4X                                  |

De weergegeven prijs is de adviesprijs in euro excl. BTW. Deze kan onderhevig zijn aan korting. Neem contact op met uw lokale distributeur of detailhandel voor de daadwerkelijke prijs

Disclaimer: Deze documentatie is niet bedoeld als vervanging voor en mag niet worden gebruikt voor het bepalen van de geschiktheid of betrouwbaarheid van deze producten voor specifieke gebruikerstoepassingen

|                        |                                                                                                                                                                      |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| IK-beschermingsgraad   | IK06 conforming to IEC 50102                                                                                                                                         |
| standards              | JIS C8201-5-1<br>IEC 60947-5-4<br>CSA C22.2 Nr 14<br>IEC 60947-5-1<br>IEC 60947-1<br>UL 508<br>IEC 60947-5-5<br>JIS C8201-1                                          |
| trilling bestendigheid | 5 gn (f= 2...500 Hz) conforming to IEC 60068-2-6                                                                                                                     |
| schokbestendigheid     | 30 gn (duur = 18 ms) voor halve sinusgolf versnelling conform aan IEC 60068-2-27<br>50 gn (duur = 11 ms) voor halve sinusgolf versnelling conform aan IEC 60068-2-27 |

## Verpakkingseenheid

|                              |           |
|------------------------------|-----------|
| Unit Type of Package 1       | PCE       |
| Number of Units in Package 1 | 1         |
| Package 1 Height             | 4,500 cm  |
| Package 1 Width              | 3,400 cm  |
| Package 1 Length             | 5,400 cm  |
| Package 1 Weight             | 24,000 g  |
| Unit Type of Package 2       | S03       |
| Number of Units in Package 2 | 300       |
| Package 2 Height             | 30,000 cm |
| Package 2 Width              | 30,000 cm |
| Package 2 Length             | 40,000 cm |
| Package 2 Weight             | 7,435 kg  |

## contractuele waarborg

|          |           |
|----------|-----------|
| Garantie | 18 months |
|----------|-----------|

## Environmental Data

Schneider Electric wil tegen 2050 de Net Zero-status hebben bereikt via partnerschappen in de toeleveringsketen, materialen met een lagere impact en circulariteit via onze doorlopende campagne "Use Better, Use Longer, Use Again" om de levensduur van producten en de recycleerbaarheid te verlengen.

[Uitleg van Environmental Data](#) >

[Hoe evalueren we de duurzaamheid van producten?](#) >



### Milieuvoetafdruk

Totale levenscyclus ecologische voetafdruk

1

Milieuprofiel van product (PEP)

[Milieuprofiel van het product](#)

## Use Better



### Materialen en verpakking

Pakket met gerecycleerd karton

Ja

Verpakkingen zonder kunststof

Ja

[EU-richtlijn RoHS](#)

Voldoet pro-actief (Product valt niet onder de EU RoHS juridische scope)

REACH-regelgeving

[REACH-verklaring](#)

## Use Again



### Herverpakken en herfabriceren

Circulair Profiel

[Informatie over einde levensduur](#)


Terugname

No

Dimensions Drawings

Dimensions

---




Mounting and Clearance

Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)

| Connection by Screw Clamp Terminals or Plug-in Connectors or on Printed Circuit Board                                                                                                                                                                                                                                       | Connection by Faston Connectors                                                    |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
|                                                                                                                                                                                                                                            |  |
| <p>(1) Diameter on finished panel or support</p> <p>(2) 40 mm min. / 1.57 in. min.</p> <p>(3) 30 mm min. / 1.18 in. min.</p> <p>(4) Ø 22.5 mm / 0.89 in. recommended (Ø 22.3 mm <math>^{+0.4}_0</math> / 0.88 in. <math>^{+0.016}_0</math>)</p> <p>(5) 45 mm min. / 1.78 in. min.</p> <p>(6) 32 mm min. / 1.26 in. min.</p> |                                                                                    |

Pushbuttons, Switches and Pilot Lights for Printed Circuit Board Connection

Panel Cut-outs (Viewed from Installer's Side)

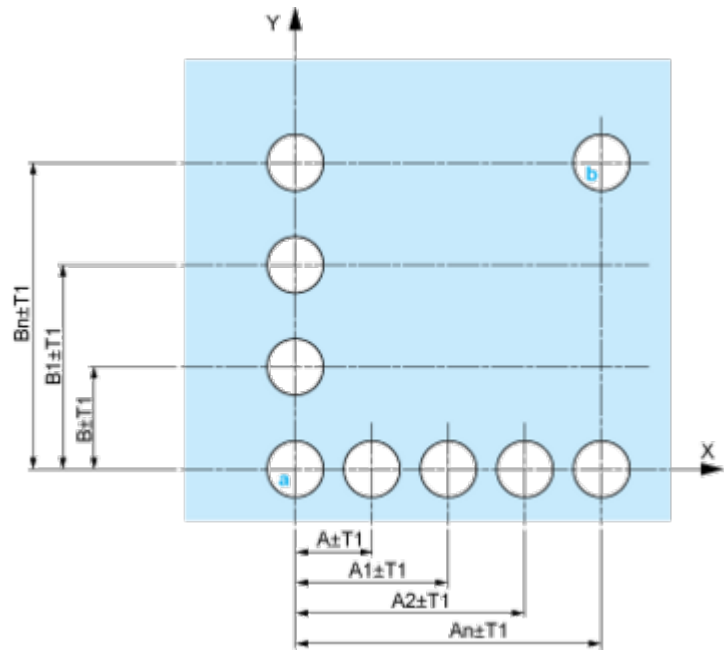

A: 30 mm min. / 1.18 in. min.

B: 40 mm min. / 1.57 in. min.

Printed Circuit Board Cut-outs (Viewed from Electrical Block Side)

Dimensions in mm



A: 30 mm min.

B: 40 mm min.

Dimensions in in.



A: 1.18 in. min.

B: 1.57 in. min.

General Tolerances of the Panel and Printed Circuit Board

The cumulative tolerance must not exceed 0.3 mm / 0.012 in:  $T1 + T2 = 0.3 \text{ mm max.}$

Installation Precautions

- Minimum thickness of circuit board: 1.6 mm / 0.06 in.
- Cut-out diameter: 22.4 mm  $\pm 0.1$  / 0.88 in.  $\pm 0.004$
- Orientation of body/fixing collar ZB4 BZ009:  $\pm 2^\circ 30'$  (excluding cut-outs marked **a** and **b**).
- Tightening torque of screws ZBZ 006: 0.6 N.m (5.3 lbf.in) max.
- Allow for one ZB4 BZ079 fixing collar/pillar and its fixing screws:
  - every 90 mm / 3.54 in. horizontally (X), and 120 mm / 4.72 in. vertically (Y).
  - with each selector switch head (ZB4 BD\*, ZB4 BJ\*, ZB4 BG\*).

The fixing centers marked **a** and **b** are diagonally opposed and must align with those marked **4** and **5**.



(1) Panel

(2) Printed circuit board

#### Mounting of Adapter (Socket) ZBZ 01•

- 1 2 elongated holes for ZBZ 006 screw access
- 2 1 hole  $\varnothing 2.4 \text{ mm} \pm 0.05 / 0.09 \text{ in.} \pm 0.002$  for centring adapter ZBZ 01•
- 3  $8 \times \varnothing 1.2 \text{ mm} / 0.05 \text{ in.}$  holes
- 4 1 hole  $\varnothing 2.9 \text{ mm} \pm 0.05 / 0.11 \text{ in.} \pm 0.002$ , for aligning the printed circuit board (with cut-out marked **a**)
- 5 1 elongated hole for aligning the printed circuit board (with cut-out marked **b**)
- 6 4 holes  $\varnothing 2.4 \text{ mm} / 0.09 \text{ in.}$  for clipping in adapter ZBZ 01•

Dimensions An + 18.1 relate to the  $\varnothing 2.4 \text{ mm} \pm 0.05 / 0.09 \text{ in.} \pm 0.002$  holes for centring adapter ZBZ 01•.

Technical Description

Electrical Composition Corresponding to Codes P1, P3, PF1, PR1 and PF2

Light block



Electrical Composition Corresponding to Code P4

---



Legend

---

Single contact



Double contact



Light block





Possible location



### Technical Illustration

## Dimensions



|                                                                                    |                                                                                    | a (mm) | a (in.) | b (mm) | b (in.) |
|------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|--------|---------|--------|---------|
|   |   | 40     | 1.57    | 30     | 1.18    |
| ZBE.....                                                                           | ZBV.....                                                                           |        |         |        |         |
|   |   | 45     | 1.77    | 32     | 1.26    |
| ZBE.....3                                                                          | ZBV.....3                                                                          |        |         |        |         |
|   |   | 40     | 1.57    | 30     | 1.18    |
| ZBE.....4                                                                          | ZBV.....4                                                                          |        |         |        |         |
|   |   | 50     | 1.97    | 30     | 1.18    |
| ZBE.....5                                                                          | ZBV.....5                                                                          |        |         |        |         |
|   |   | 40     | 1.57    | 30     | 1.18    |
| ZBE.....9                                                                          | ZBV.....9                                                                          |        |         |        |         |
|  |  | 40     | 1.57    | 30     | 1.18    |
| ZBRT●                                                                              | ZBRV1                                                                              |        |         |        |         |

Offer Marketing Illustration

Product benefits / Features

---

### Features

Harmony XB4/XB5 Illuminated functions



NEW universal LED Block for all colors





Simple stock management





Improved installation time and easy selection





Improved color intensity and brightness



Offer Marketing Illustration

Product benefits / Features

---

### Features

Harmony XB4



Quick and easy assembly and disassembly



Various types of connection: screw clamp, connector, Faston connector, spring terminal, or printed circuit board



Excellent mechanical connection with operator head



Large set of accessories to customize your panels



Robustness to withstand harsh environments



Offer Marketing Illustration

Product benefits / Features

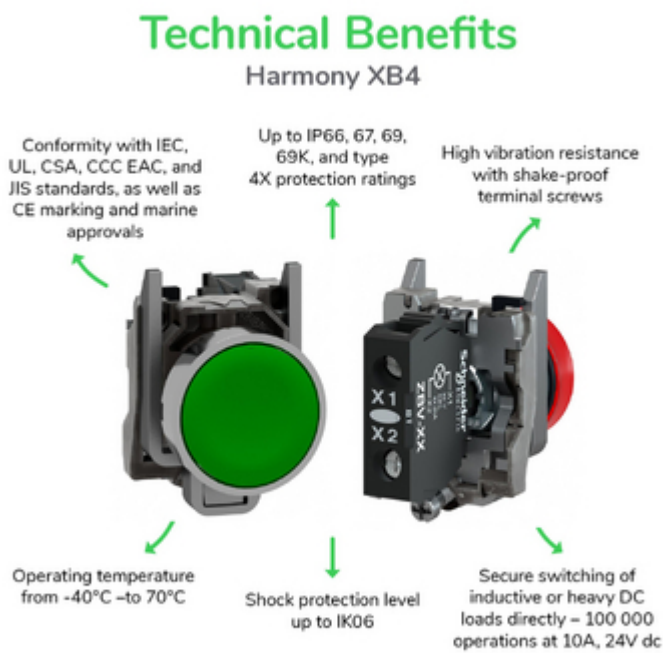


Image of product / Alternate images

Alternative

---

