


START eco Batten IP65 - NEW
START eco Batten 1200 IP65 5200lm 840
0045750



Product features

- The new upgraded START eco Batten IP65 is a versatile range of slimline LED waterproof luminaires that provide an ideal solution for applications such as workshops, garages and outdoor covered spaces. The design allows the luminaire to be easily linked to another luminaire through an IP65 rated connector. The product can be a slimline replacement for single and twin 36W/58W fluorescent waterproof battens. Polycarbonate housing and diffuser, 5200 lm, 36 W, 144 lm/W, 4000 K, drive current 80 mA, non dimmable, CRI 80, IP65, IK08, Class II, nominal average lifetime (h): 30000, 1260 mm x 80 mm x 55 mm, energy class: A++ A+ A.


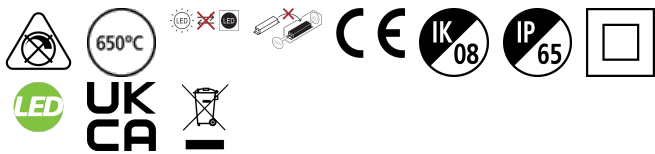


PRODUCT OVERVIEW

Product name	START eco Batten 1200 IP65 5200lm 840
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
General application	Residential & Consumer
ETIM Class	EC000109
E-number FI	4278236
Warranty	3 years
Useful luminous flux (Fuse)	5200
Fixture luminous flux (lm)	5200
Luminaire efficacy (lm/W)	144
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Beam Angle (°)	120
Photobiological Risk Group	RG0
Total power consumption (W)	36
Electrical protection	Class II
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	White
IP rating	IP65
IK rating	IK08
Product EAN number	5410288457505

PHOTOMETRY

START eco Batten IP65 - NEW
START eco Batten 1200 IP65 5200lm 840
0045750



TECHNICAL DRAWINGS

