


Walraven BISMAT® 2000 (M8) 1-screw

(A0517)

for steel, copper, cast iron and plastic (multilayer) pipe

Features & benefits

- single screw clamp
- with Walraven BISMAT® quick locking system
- material: steel
- zinc plated
- sound insulating lining according DIN 4109
- noise reduction according to ISO 3822-1 up to 23 dB(A)
- tested for fire safety

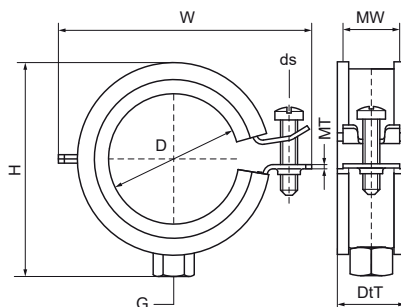

Product Number	Outside Pipe Diameter	DN	Pipe Diameter Imperial	Connection Thread	Material Width x Material Thickness	Screw Size	Total Width x Total Height x Total Depth	Approvals	Maximum Allowed Load Faz
Reference letter	D	D	D	G	MW x MT	ds	W x H x DtT		Fa,z
Unit description	mm		"		mm x mm		mm x mm x mm		N
3413014	11 - 14	DN 8	1/4	M8	20 x 1.00	M6	48 x 32 x 20	ITB (KOT) CE ETA ISO 3822-1 RAL-GZ 655/B RAL-GZ 656 EPD	600
3413018	15 - 18	DN 10	3/8	M8	20 x 1.00	M6	48 x 36 x 20	RAL-GZ 656 ITB (KOT) CE ETA ISO 3822-1 RAL-GZ 655/B EPD	600
3413023	20 - 23	DN 15	1/2	M8	20 x 1.00	M6	55 x 39 x 20	RAL-GZ 656 ITB (KOT) CE ETA ISO 3822-1 RAL-GZ 655/B EPD	600
3413028	25 - 28	DN 20	3/4	M8	20 x 1.00	M6	60 x 44 x 20	RAL-GZ 656 ITB (KOT) CE ETA ISO 3822-1 RAL-GZ 655/B EPD	600
3413035	31 - 35	DN 25	1	M8	20 x 1.00	M6	67 x 51 x 20	RAL-GZ 656 ITB (KOT) CE ETA ISO 3822-1 RAL-GZ 655/B EPD	600
3413039	36 - 39	-	-	M8	20 x 1.25	M6	75 x 56 x 20	ITB (KOT) CE ETA ISO 3822-1 RAL-GZ 655/B RAL-GZ 656	800
3413043	40 - 43	DN 32	1 1/4	M8	20 x 1.25	M6	20 x 60 x 75	RAL-GZ 656 ITB (KOT) CE ETA ISO 3822-1 RAL-GZ 655/B EPD	800
3413045	44 - 45	-	-	M8	20 x 1.25	M6	85 x 63 x 20	ITB (KOT) CE ETA ISO 3822-1 RAL-GZ 655/B RAL-GZ 656	800
3413053	48 - 51	DN 40	1 1/2	M8	20 x 1.25	M6	85 x 66 x 20	RAL-GZ 656 ITB (KOT) CE ETA ISO 3822-1 RAL-GZ 655/B EPD	800
3413054	53 - 56	-	-	M8	20 x 1.25	M6	89 x 72 x 20	RAL-GZ 656 ITB (KOT) CE ETA ISO 3822-1 RAL-GZ 655/B EPD	800
3413063	59 - 63	DN 50	2	M8	20 x 1.25	M6	92 x 80 x 20	RAL-GZ 656 ITB (KOT) CE ETA ISO 3822-1 RAL-GZ 655/B EPD	800