


## Walraven BISMAT® 2000 (M8/10) 1-screw

(A0516)

for steel, copper, cast iron and plastic (multilayer) pipe

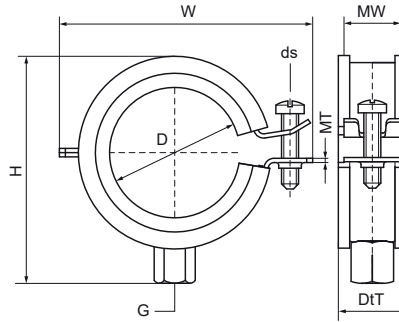

### Features & benefits

- single screw clamp
- with Walraven BISMAT® quick locking system
- material: steel
- zinc plated
- sound insulating lining according DIN 4109
- noise reduction according to ISO 3822-1 up to 23 dB(A)
- tested for fire safety



| Product Number   | Outside Pipe Diameter | DN    | Pipe Diameter Imperial | Connection Thread | Material Width x Material Thickness | Screw Size | Total Width x Total Height x Total Depth | Approvals                                                           | Maximum Allowed Load Faz |
|------------------|-----------------------|-------|------------------------|-------------------|-------------------------------------|------------|------------------------------------------|---------------------------------------------------------------------|--------------------------|
| Reference letter | D                     | D     | D                      | G                 | MW x MT                             | ds         | W x H x DtT                              |                                                                     | Fa,z                     |
| Unit description | mm                    |       | "                      |                   | mm x mm                             |            | mm x mm x mm                             |                                                                     | N                        |
| 3403018          | 15 - 18               | DN 10 | 3/8                    | M8/M10            | 20 x 1.00                           | M6         | 47 x 46 x 20                             | RAL-GZ 656   ITB (KOT)   CE   ETA   ISO 3822-1   RAL-GZ 655/B   EPD | 600                      |
| 3403023          | 20 - 23               | DN 15 | 1/2                    | M8/M10            | 20 x 1.00                           | M6         | 52 x 51 x 20                             | RAL-GZ 656   ITB (KOT)   CE   ETA   ISO 3822-1   RAL-GZ 655/B   EPD | 600                      |
| 3403028          | 25 - 28               | DN 20 | 3/4                    | M8/M10            | 20 x 1.00                           | M6         | 57 x 56 x 20                             | RAL-GZ 656   ITB (KOT)   CE   ETA   ISO 3822-1   RAL-GZ 655/B   EPD | 600                      |
| 3403035          | 31 - 35               | DN 25 | 1                      | M8/M10            | 20 x 1.00                           | M6         | 64 x 63 x 20                             | RAL-GZ 656   ITB (KOT)   CE   ETA   ISO 3822-1   RAL-GZ 655/B   EPD | 600                      |
| 3403043          | 40 - 43               | DN 32 | 1 1/4                  | M8/M10            | 20 x 1.25                           | M6         | 72 x 71 x 20                             | RAL-GZ 656   ITB (KOT)   CE   ETA   ISO 3822-1   RAL-GZ 655/B   EPD | 800                      |
| 3403053          | 48 - 51               | DN 40 | 1 1/2                  | M8/M10            | 20 x 1.25                           | M6         | 80 x 79 x 20                             | RAL-GZ 656   ITB (KOT)   CE   ETA   ISO 3822-1   RAL-GZ 655/B   EPD | 800                      |
| 3403054          | 53 - 56               | -     | -                      | M8/M10            | 20 x 1.25                           | M6         | 85 x 84 x 20                             | RAL-GZ 656   ITB (KOT)   CE   ETA   ISO 3822-1   RAL-GZ 655/B   EPD | 800                      |
| 3403063          | 59 - 63               | DN 50 | 2                      | M8/M10            | 20 x 1.25                           | M6         | 91 x 90 x 20                             | RAL-GZ 656   ITB (KOT)   CE   ETA   ISO 3822-1   RAL-GZ 655/B   EPD | 800                      |