

Concord

BEACON XL MUSE 3K SSC01 L3 WHT

2059327



Features

• 2059327 BEACON XL MUSE 3K SSC01 L3 WHT Integrated LED spotlight, white RAL 9016, unique soft-touch ring, adjustable beam angle from a 10° spot to a 70° flood, compact and minimalist design, ideal for museum, gallery and high-end retail applications, die-cast aluminium body, passive cooling heatsink, beam angle: 10° spot to 70° flood, optics: aspheric glass lens, colour temperature: 3000K warm white, total system power: 41W, total fixture output: 2544lm, luminaire efficacy: 62lm/W, LOR: 100%, super high colour rendering: Ra 97 typical, R9 value at 90, LED Chromacity: 3 step MacAdam ellipse, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 1050mA, electronic driver, SylSmart SSC, power factor: 0.95, electrical protection: CLASS I, 3-circuit track adaptor, suitable for Concord Lytespan 3 track, ingress protection rating: IP20, suitable for internal environment on...

Product Overview

Product name	BEACON XL MUSE 3K SSC01 L3 WHT
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting
Environment	Internal
Fixture luminous flux (lm)	2544
Luminaire efficacy (lm/W)	62
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	97
Colour Consistency (SDCM)	3
Photobiological Risk Group	RG0


Concord

BEACON XL MUSE 3K SSC01 L3 WHT

2059327

Total power consumption (W)	41
Electrical protection	Class I
Control gear type	Electronic ballast
Housing colour	White
IP rating	IP20
Product EAN number	5025768593279
Warranty	5 years

Photometry

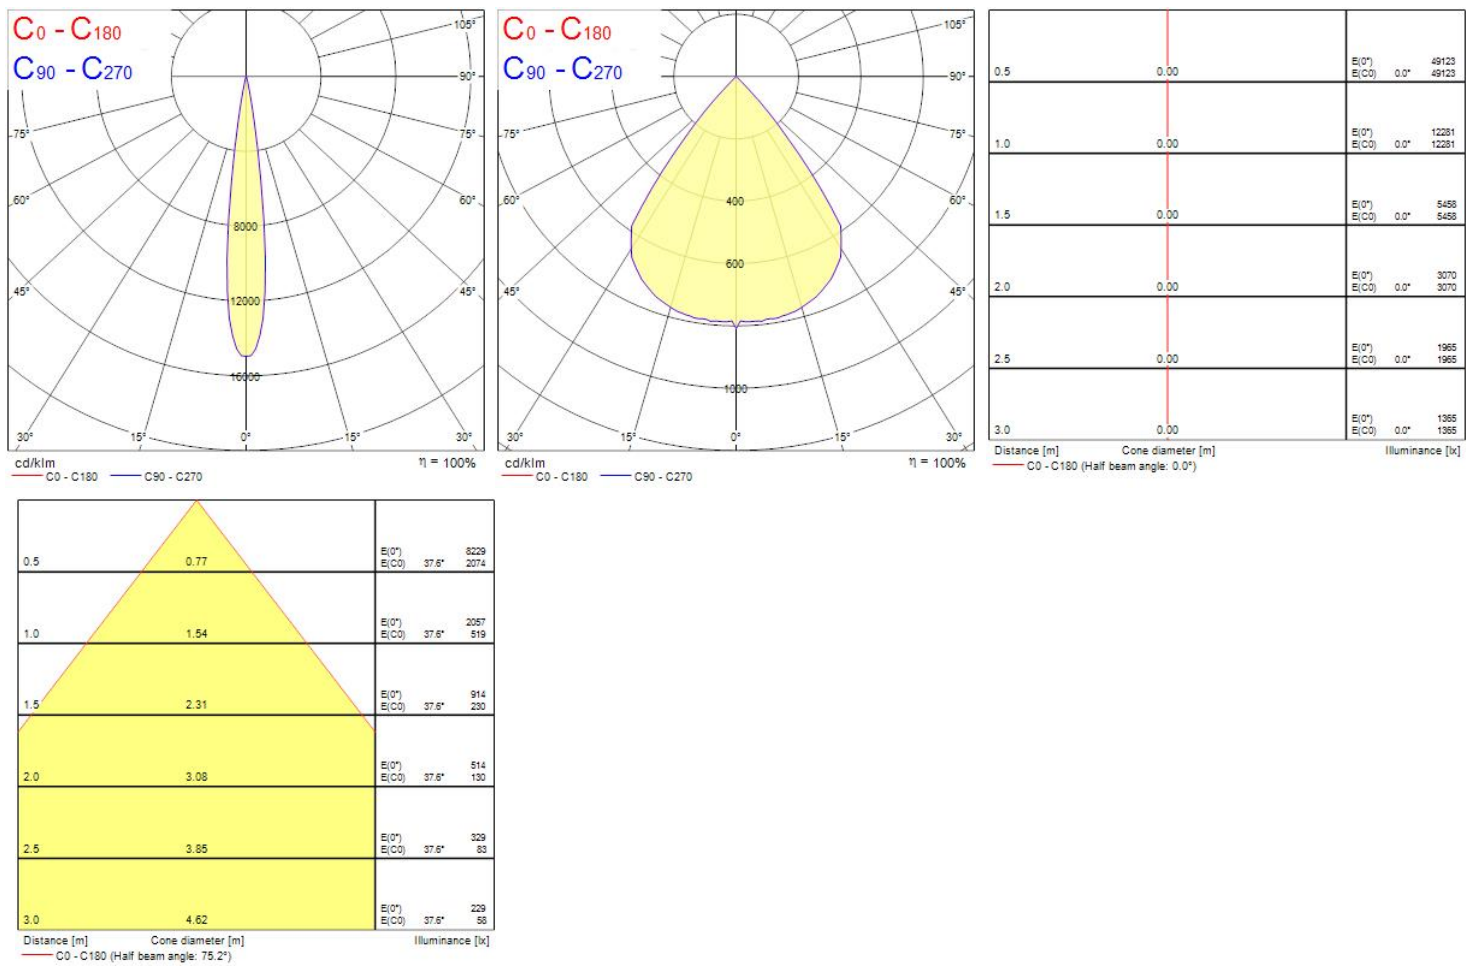


Concord

BEACON XL MUSE 3K SSC01 L3 WHT

2059327

Technical drawings

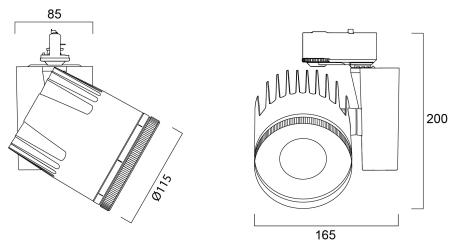

Data table

GENERAL DATA

Product name	BEACON XL MUSE 3K SSC01 L3 WHT
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting
Environment	Internal
Performance ambient temperature Tq (°C)	25
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	2544
Luminaire efficacy (lm/W)	62
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	97
Colour Consistency (SDCM)	3
Adjustable chromaticity	N
Photobiological Risk Group	RG0

ELECTRICAL DATA

Total power consumption (W)	41
Primary Supply/Product voltage - min (V)	220
Lamp power factor	0.95
Electrical protection	Class I
Control gear required	No
Control gear type	Electronic ballast
Drive current (mA)	1050
Inrush Current (A)	5
Inrush Duration (µs)	50
Energy Efficiency Class (A->G) of contained light source	F
Max. products per 10A C Breaker	52
Max. products per 20A B Breaker	63

LIFETIME DATA

Lifespan L70 B50	100000
Lifespan L80 B20	100000
Lifespan L90 B10	86000

PHYSICAL DATA

Housing colour	White
IP rating	IP20
Nominal Product Width (mm)	165
Nominal Product Diameter (mm)	115
Weight (kg)	1.7

PACKAGING

Single packaging type	Carton
Product EAN number	5025768593279
Packaging single width (cm)	19.5
Packaging single depth (cm)	20.0
DUN14 (outer)	05025768593279

Concord

BEACON XL MUSE 3K SSC01 L3 WHT
2059327

Packaging outer length / height (cm)	25.0
--------------------------------------	------

SAFETY DATA

Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No