

## Insaver HE Topper LED 150 PIR


### INSAVER 150 HE TOPPER LED WW PIR PLUS3

#### 3033924



#### Product features

- Insaver HE Topper is a ceiling recessed LED downlight with integrated PIR sensor with time (up to 8 mins) and daylight lux level settings. Die-cast aluminium body, Non dimmable LED driver, 8W, 740lm, 93lm/W, 3000K, shallow recessed depth of 55mm. Wieland GST compatible.

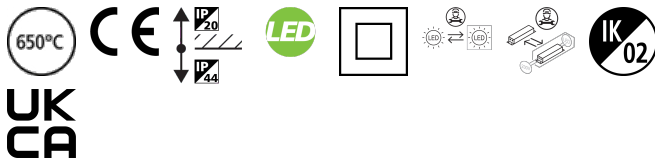

#### PRODUCT OVERVIEW

Product name	INSAVER 150 HE TOPPER LED WW PIR PLUS3
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	External
General application	Hospitality, Logistics & Industry, Office
ETIM Class	EC001744
Warranty	3 years
Fixture luminous flux (lm)	740
Luminaire efficacy (lm/W)	93
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Beam Angle (°)	64
Total power consumption (W)	8
Electrical protection	Class II
Control gear type	Electronic ballast
Dimming method	N/A
Housing colour	White
IP rating	IP44/20
IK rating	IK02
Product EAN number	8711971339243

#### DATA TABLE

##### General data

Product name	INSAVER 150 HE TOPPER LED WW PIR PLUS3
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	External

## Insaver HE Topper LED 150 PIR

*INSAVER 150 HE TOPPER LED WW PIR PLUS3*  
3033924

General application	Hospitality, Logistics & Industry, Office
ETIM Class	EC001744
Warranty	3 years

### Optical data

Fixture luminous flux (lm)	740
Luminaire efficacy (lm/W)	93
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Adjustable chromaticity	N
Beam Angle (°)	64

### Electrical data

Total power consumption (W)	8
Electrical protection	Class II
Control gear type	Electronic ballast
Dimming method	N/A
Drive current (mA)	350
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	E

### Physical data

Housing colour	White
IP rating	IP44/20
IK rating	IK02
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Reflector finish	Other
Nominal Product Height (mm)	55
Nominal Product Diameter (mm)	165
Cutout Dimensions (W x L in mm or Diameter in mm)	145 x 145
Weight (kg)	0.7

### Packaging

Single packaging type	Carton
Product EAN number	8711971339243
Packaging single length / height (cm)	25.0
Packaging single width (cm)	17.0
Packaging single depth (cm)	14.0
DUN14 (outer)	18711971339240
Units per outer package	12
Packaging outer length / height (cm)	78.0
Packaging outer width (cm)	36.0
Packaging outer depth (cm)	31.0

## Insaver HE Topper LED 150 PIR


*INSAVER 150 HE TOPPER LED WW PIR PLUS3*  
3033924

### PHOTOMETRY

0.5	0.71	E(0°) E(C0)	35.4°	1939 526
1.0	1.42	E(0°) E(C0)	35.4°	485 132
1.5	2.13	E(0°) E(C0)	35.4°	219 58
2.0	2.84	E(0°) E(C0)	35.4°	121 33
2.5	3.55	E(0°) E(C0)	35.4°	78 21
3.0	4.26	E(0°) E(C0)	35.4°	54 15

Distance [m]      Cone diameter [m]      Illuminance [lx]

— C0 - C180 (Half beam angle: 70.8°)

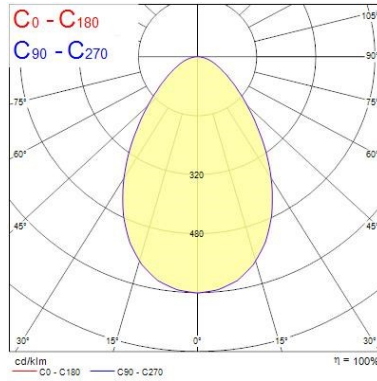

### TECHNICAL DRAWINGS

