

START BATTEN SLIM 1500 PIR 2900LM 840 LILO
0045303



Features

- LED Batten with Loop in Loop out (LILO) connection block to replace traditional T8 batten (1500mm), ease of installation, 24W, 2900 lm, 4000K, 50000h lifetime




Product Overview


Product name	START BATTEN SLIM 1500 PIR 2900LM 840 LILO
Cap/Base	N/A
Housing	PC Polycarbonate
General application	Logistics & Industry
ETIM Class	EC000109
Fixture luminous flux (lm)	2900
Luminaire efficacy (lm/W)	120
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Photobiological Risk Group	RG1
Total power consumption (W)	24
Electrical protection	Class I
IP rating	IP20
IK rating	IK02
Product EAN number	5410288453033
Warranty	5 years

START BATTEN SLIM 1500 PIR 2900LM 840 LILO
0045303

Photometry

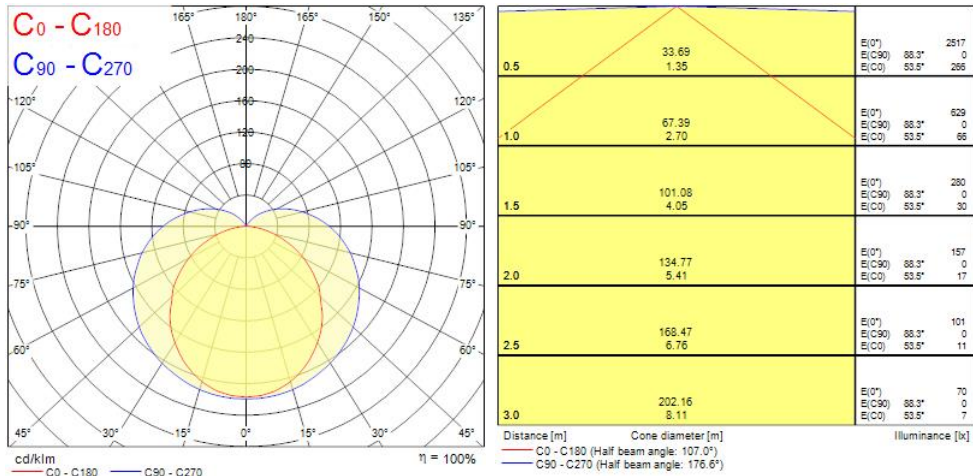

Technical drawings



Data table

GENERAL DATA

Product name	START BATTEN SLIM 1500 PIR 2900LM 840 LILO
Cap/Base	N/A
Housing	PC Polycarbonate
General application	Logistics & Industry
Performance ambient temperature Tq (°C)	25

START BATTEN SLIM 1500 PIR 2900LM 840 LILO 0045303

ETIM Class	EC000109
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	2900
Luminaire efficacy (lm/W)	120
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Photobiological Risk Group	RG1

ELECTRICAL DATA

Total power consumption (W)	24
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Electrical protection	Class I
Control gear required	No
Drive current (mA)	60
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	21
Max. products per 13A C Breaker	27
Max. products per 16A C Breaker	33
Max. products per 20A C Breaker	42
Max. products per 10A B Breaker	14
Max. products per 13A B Breaker	18
Max. products per 16A B Breaker	22
Max. products per 20A B Breaker	28

LIFETIME DATA

Lifespan L70 B50	50000
------------------	-------

PHYSICAL DATA



START BATTEN SLIM 1500 PIR 2900LM 840 LILO
0045303

IP rating	IP20
IK rating	IK02
Nominal Product Length (mm)	1500
Nominal Product Width (mm)	41.8
Nominal Product Height (mm)	56.4
Weight (kg)	0.59

PACKAGING

Product EAN number	5410288453033
Packaging single length / height (cm)	150.0
Packaging single width (cm)	4.18
Packaging single depth (cm)	5.64
DUN14 (inner)	15410288453030
Units per outer package	20
Packaging outer length / height (cm)	152.0
Packaging outer width (cm)	26.5
Packaging outer depth (cm)	25.5

SAFETY DATA

Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No