

70503000	DATA SHEET	
Valid from: 15.06.2026	EPIC® H-A 32 AD	

Description

- The large, robust housing for two inserts of size 16.



General characteristics

Series	H-A 32
Version	Panel mount base with cover
Locking	Bolts for double lever
Protection (DIN EN 60529)	IP 65 (latched)
Temperature range	-40°C to +125°C

Materials and surfaces

Housing	Aluminium alloy, powder-coated, grey
Lever	Steel, galvanized
Gasket	NBR
Cover	Aluminium alloy, powder-coated, grey

Approvals

UL File Number	In preparation
----------------	----------------


Standards

Safety Standard	IEC 61984
-----------------	-----------

We reserve all rights according to DIN ISO 16016.
PD 0019/05_04.18EN

70503000	DATA SHEET	
Valid from: 15.06.2026	EPIC® H-A 32 AD	

Technical Drawings

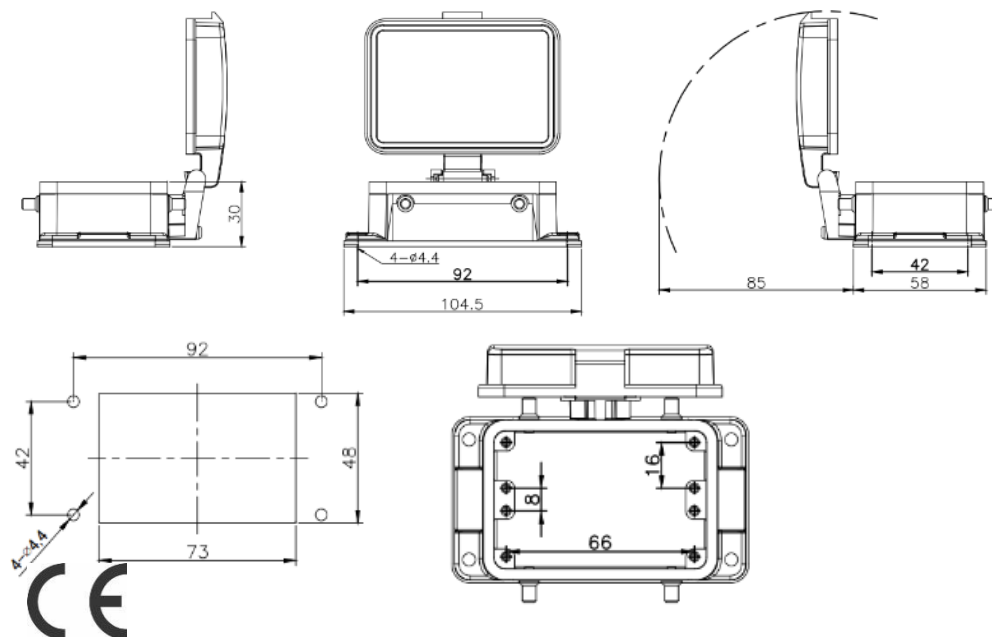

Industrial machinery and plant engineering



Mechanical resistance



Robust



Waterproof

Info

Compact, robust metal housings size H-A 32

Application range

Machine and equipment manufacturing

Control engineering

Electronic laboratory

Remark

Photographs are not to scale and do not represent detailed images of the respective products.

Creator: LEBU1 / PDP Released: THBO1 / PDP	Document: DB70503000EN Version: 01	Page 2 of 2
---	---------------------------------------	-------------