
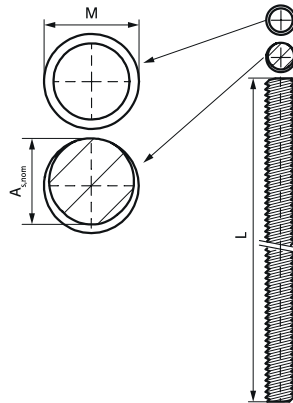


Walraven Threaded Rod

(K5510)

for threaded connections, hangers and ties,

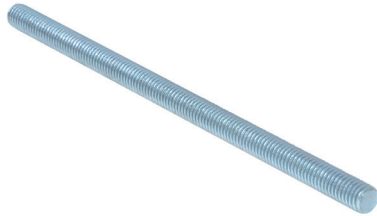

Features & benefits

- according to DIN 976-1
- material: steel, strength class 4.8
- zinc plated
- thread with 60° angle provides best performance
- M10 and M12 tested for fire safety according to EN 1363-1
- M7B: pitch = M7 x 1 mm
- M7F: pitch = M7 x 1.5 mm



Product Number	Norm / Standard	Thread Size	Total Width x Total Height x Total Length
Reference letter		TS	W x H x L
Unit description			(mm) x (mm) x (mm)
6303008	DIN 976-1	M8	8 x 8 x 1000
6303010	DIN 976-1	M10	10 x 10 x 1000
6303012	DIN 976-1	M12	12 x 12 x 1000
6303014	DIN 976-1	M14	14 x 14 x 1000
6303016	DIN 976-1	M16	16 x 16 x 1000
6303020	DIN 976-1	M20	20 x 20 x 1000
6303024	DIN 976-1	M24	24 x 24 x 1000
6303206	DIN 976-1	M6	6 x 6 x 2000
6303208	DIN 976-1	M8	8 x 8 x 2000
6303210	DIN 976-1	M10	10 x 10 x 2000
6303212	DIN 976-1	M12	12 x 12 x 2000
6303216	DIN 976-1	M16	16 x 16 x 2000
6303306	DIN 976-1	M6	6 x 6 x 3000
6303308	DIN 976-1	M8	8 x 8 x 3000
6303310	DIN 976-1	M10	10 x 10 x 3000
6303312	DIN 976-1	M12	12 x 12 x 1000
6303316	DIN 976-1	M16	16 x 16 x 3000
6303007F	DIN 976-1	M7x1.5	7 x 7 x 1000
6303006	DIN 976-1	M6	6 x 6 x 1000
6303007	DIN 976-1	M7x1.0	7 x 7 x 1000