


Walraven VibraTek® SB-FF Silentblock

(L20566)

a rubber silentblock with two internal threads

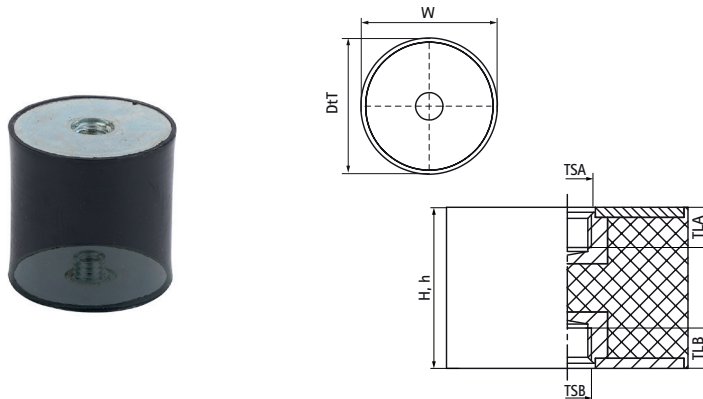

Features & benefits

- a universal rubber absorber, ideal for use with all kinds of elastic suspension or mounting of equipment
- ideal for use with machinery and equipment mounted on metallic surface
- with two female threads
- for use in compression only
- working temperature range -30 °C till 80 °C

Product Number	Thread Size A	Thread Size B	Thread Length A	Thread Length B	Total Width x Total Height x Total Depth	Height	Maximum Allowed Load Faz
Reference letter	TSA	TSB	TLA	TLB	W x H x DtT	h	F _{0,z}
Unit description			mm	mm	mm x mm x mm	mm	N
2801600181	M8	M8	8	8	20 x 20 x 20	20	180
2801600291	M8	M8	8	8	25 x 20 x 25	20	290
2801600420	M8	M8	8	8	30 x 25 x 30	25	420
2801600750	M8	M8	8	8	40 x 40 x 40	40	750
2801601170	M10	M10	8	8	50 x 40 x 50	40	1,170
2801601690	M12	M12	10	10	60 x 40 x 60	40	1,690