


Walraven VibraTek® SB-MF Silentblock

(L20563)

a rubber silentblock with an external and internal thread

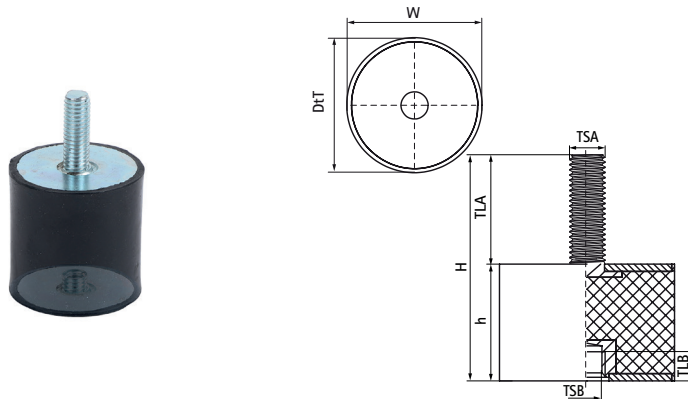

Features & benefits

- a universal rubber absorber, ideal for use with all kinds of elastic suspension or mounting of equipment
- ideal for use with machinery and equipment mounted on metallic surface
- with a male and female thread
- for use in compression only
- working temperature range -30 °C till 80 °C

Product Number	Thread Size A	Thread Size B	Thread Length A	Thread Length B	Total Width x Total Height x Total Depth	Height	Maximum Allowed Load Faz
Reference letter	TSA	TSB	TLA	TLB	W x H x DtT	h	F _{0,z}
Unit description			mm	mm	mm x mm x mm	mm	N
2801500181	M8	M8	23	8	20 x 43 x 20	20	180
2801500291	M8	M8	23	8	25 x 43 x 25	20	290
2801500420	M8	M8	23	8	30 x 48 x 30	25	420
2801500750	M8	M8	23	8	40 x 63 x 40	40	750
2801501170	M10	M10	28	8	50 x 67 x 50	40	1,170
2801501690	M12	M12	37	10	60 x 77 x 60	40	1,690