


Walraven VibraTek® SB-MM Silentblock

(L20560)

a rubber silentblock with two external threads

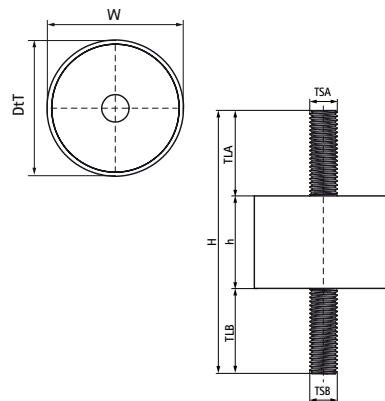

Features & benefits

- a universal rubber absorber, ideal for use with all kinds of elastic suspension or mounting of equipment
- ideal for use with machinery and equipment mounted on metallic surface
- with two male threads
- for use in compression only
- working temperature range -30 °C till 80 °C

Product Number	Thread Size A	Thread Size B	Thread Length A	Thread Length B	Total Width x Total Height x Total Depth	Height	Maximum Allowed Load $F_{0,z}$
Reference letter	TSA	TSB	TLA	TLB	$W \times H \times DtT$	h	$F_{0,z}$
Unit description			mm	mm	mm x mm x mm	mm	N
2801400181	M8	M8	23	23	20 x 66 x 20	20	180
2801400291	M8	M8	23	23	25 x 66 x 25	20	290
2801400420	M8	M8	23	23	30 x 71 x 30	25	420
2801400550	M8	M8	23	23	40 x 76 x 40	30	550
2801400750	M8	M8	23	23	40 x 86 x 40	40	750
2801401170	M10	M10	28	28	50 x 94 x 50	40	1,170
2801401690	M12	M12	37	37	60 x 114 x 60	40	1,690