


## Data Sheet | Item Number: 216-284

Ferrule; Sleeve for 1.5 mm<sup>2</sup> / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black

<https://www.wago.com/216-284>

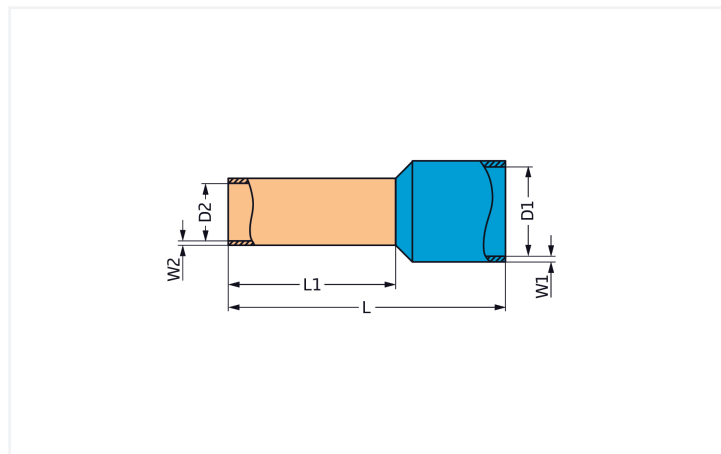

Color: ■ black

Similar to illustration

Dimensions in mm

### Connection Data

Metric cross-section of the ferrule	1.5 mm <sup>2</sup>
Strip length	20 ... 21 mm / 0.79 ... 0.83 inches
Cross-section (AWG) of ferrule	16 AWG

### Physical data

Total length	24 mm
Wall thickness of crimp sleeve	0.15 mm
Wall thickness (plastic collar)	0.25 mm
Crimp length (length of sleeve)	18 mm
Inner diameter of plastic collar	3.5 mm
Diameter crimp sleeve inside	1.7 mm

### Mechanical data

Plastic collar	Standard collar
Suitable	2010 to 2016 Series

### Material data

Color	black
Fire load	0 MJ
Weight	0.2 g

**Commercial data**

Product Group	2 (Terminal Block Accessories)
PU (SPU)	1000 pcs
Packaging type	Box
Country of origin	DE
GTIN	4044918604307
Customs tariff number	85369010000

**Product Classification**

UNSPSC	39121405
eCl@ss 10.0	27-40-02-01
eCl@ss 9.0	27-40-02-01
ETIM 9.0	EC000005
ETIM 10.0	EC000005
ECCN	NO US CLASSIFICATION

**Environmental Product Compliance**

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

**Downloads**

**Environmental Product Compliance**

**Compliance Search**


Environmental Product Compliance 216-284	↓
--	---

**Documentation**

**Bid Text**

216-284	19.02.2019	xml 2.80 KB	↓
216-284	11.09.2017	doc 23.50 KB	↓

**Installation Notes**



A perfect gas-tight crimp – both electrical-ly and mechanically reliable

Subject to changes. Please also observe the further product documentation!

Current addresses can be found at: [www.wago.com](http://www.wago.com)