


Walraven RapidStrut® Slide Nut (BUP1000)

(H2415)

to connect construction parts to the rail

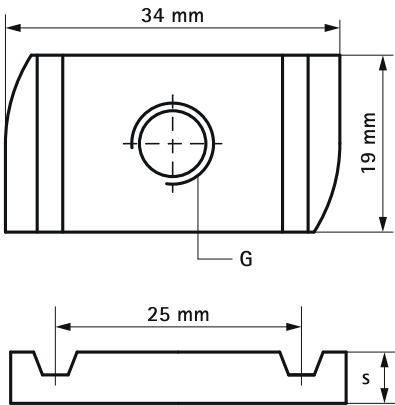

Features & benefits

- for all types of Walraven RapidStrut® Rail
- for tight fixing of accessories (e.g. connectors) on rail
- material: steel 1.0332
- product is part of the Walraven Walraven UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- M10 & M12 tested for fire safety according to EN 1366-1.
- Tested values in combination with Walraven RapidStrut® Rail 41x41x2.5mm.



Product Number	Thread Size	Material Thickness	Maximum Allowed Load Fax	Maximum Allowed Load Faz	Total Width x Total Height x Total Depth
Reference letter	TS	MT	Fa,x	Fa,z	W x H x DtT
Unit description		(mm)	(N)	(N)	(mm) x (mm) x (mm)
65188006	M6	5	950	2660	34 x 5 x 19
65188008	M8	6	2200	4500	34 x 6 x 19
65188010	M10	9	2550	5000	34 x 8 x 19
65188012	M12	9	2950	5000	34 x 9 x 19