

Pluggable Multi-Pole SPD for DC Systems

ProTec T2 DCU 3Y

Class II • DC SPD Type 1



Location of Use: DC Systems, EV Chargers
 Network Systems: Unipolar grounded / ungrounded, TN, TT*, IT*
 Mode of Protection: (+)-PE/G, (-)-PE/G, (+)-(-)
 IEC/UL Category: Class II, DC SPD Type 1
 Housing: Pluggable Design
 Compliance: IEC 61643-41:2025
 UL 1449 5th Edition, Supplement SB



Technical Data

ProTec T2-xxxxDCU-3Y(-R)

		500	1000	1500
IEC Electrical				
Nominal DC System Voltage	(+)-(-) U_n	500 V	1000 V	1500 V
Maximum Continuous Operating Voltage (DC)	(+)-(-) U_c	500 V	1000 V	1500 V
	(+)/(-)-PE U_c	500 V	1000 V	1500 V
Nominal Discharge Current (8/20 μ s)	I_n	20 kA	20 kA	20 kA
Maximum Discharge Current	I_{max}	40 kA	40 kA	40 kA
Total Discharge Current (8/20 μ s)	I_{Total}	70 kA	70 kA	55 kA
Impulse Discharge Current (10/350 μ s)	I_{imp}	5 kA	5 kA	2.8 kA
Total Discharge Current (10/350 μ s)	I_{Total}	10 kA	10 kA	3 kA
Voltage Protection Level	(+)-(-) U_p	2400 V	3150 V	3700 V
	(+)/(-)-PE U_p	2400 V	3150 V	3700 V
Response Time	t_A		<25 ns	
Overvoltage Category			III	
Backup fuse, if required		200 A gBat**	200 A gBat***	200 A gBat***
Short-Circuit Current Rating (DC)	I_{SCCR}		30 kA (L/R < 3 ms)	
Number of Ports			1	
UL Electrical				
Maximum Permitted DC Voltage	(+)-(-) V_{dcmcov}	500 V	1000 V	1500 V
	(+)/(-)-G V_{dcmcov}	500 V	1000 V	1500 V
Voltage Protection Rating	VPR	1800 V	2500 V	3000 V
Nominal Discharge Current (8/20 μ s)	I_n		20 kA	
Short-Circuit Current Rating (DC)	SCCR		100 kA	
Mechanical & Environmental				
Operating Temperature Range	T_a	-40 °F to +185 °F [-40 °C to +85 °C]		
Permissible Operating Humidity	RH	5%...95%		
Pollution Degree		2		
Altitude (max)		6562 ft [2000 m]		
Terminal Screw Torque	M_{max}	35 lbf-in per UL 1449 [4.5 Nm]		
Conductor Cross Section (max)		6 AWG (Solid, Stranded) per UL 1449		
		35 mm ² (Solid, Stranded) / 25 mm ² (Flexible)		
		Cu Only per UL 1449		
Mounting		35 mm DIN Rail, EN 60715		
Degree of Protection		IP 20 (built-in)		
Housing Material		Thermoplastic: Extinguishing Degree UL 94 V-0		
Thermal Protection		Yes		
Operating State / Fault Indication		Green Flag / Not Green Flag		
Remote Contacts (RC)		Optional		
RC Switching Capacity		AC: 125 V / 1 A; DC: 48 V / 0.5 A, 24 V / 0.5 A, 12 V / 0.5 A		
RC Conductor Cross Section (max)		16 AWG (Solid) / 1.5 mm ² (Solid)		
Overvoltage Category		III		


*Only for DC power systems which are electrically separated from AC power systems.

ETI NH1 BAT 200A/500V DC (004723266), *ETI NH1 BAT 200A/1500V DC (004110656)

Internal Configuration

Legend

	PE / G Conductor Terminal
	Remote Contacts Terminal (Optional)
	Thermal Disconnecter

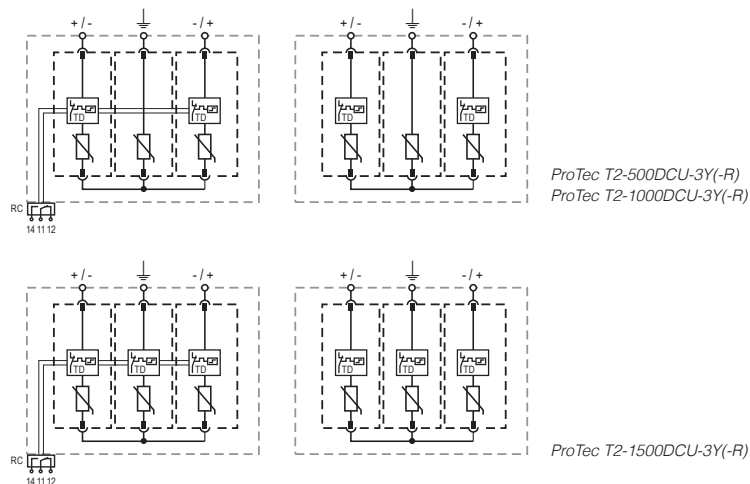


Order Information

Order Code	500	1000	1500
ProTec T2-xxxxDCU-3Y	59.A983	59.A985	59.A987
ProTec T2-xxxxDCU-3Y-R (with remote contacts)	59.A984	59.A986	59.A988
ProTec T2-250DCU-M-P (side plug)	59.A989	-	-
ProTec T2-250DCU-P (middle plug)	59.A990	-	-
ProTec T2-500DCU-M-P (side plug)	-	59.A991	-
ProTec T2-500DCU-P (middle plug)	-	59.A992	-
ProTec T2-750DCU-M-P (plug)	-	-	59.A993

Dimensions & Packaging


inches [mm]

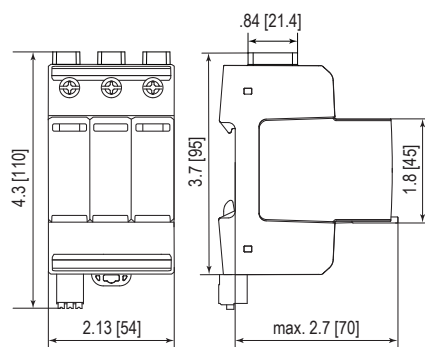

Complete Unit Dimensions & Packaging

ProTec T2-xxxxDCU-3Y	500	1000	1500
Weight	pounds .772	.831	.791
	grams 350	377	359
ProTec T2-xxxxDCU-3Y-R			
Weight	pounds .789	.849	.809
	grams 358	385	367
DIN 43880 Dimension	3 TE / 2.13" [54mm]		
Packaging Dimensions (HxWxL)	4.3 x 4.5 x 13.8" [109 x 115 x 352 mm]		
Standard Order Quantity	5 Units		

Spare Plug

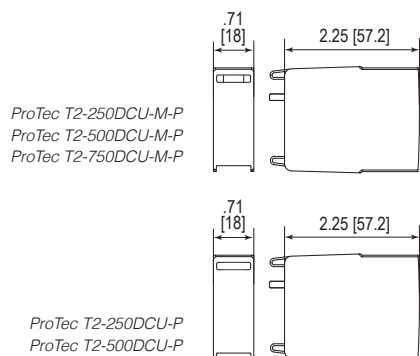

Single Unit Dimensions & Packaging

ProTec T2-xxxDCU-M-P	250	500	750
Weight	pounds .141	.161	.146
	grams 64	73	66
ProTec T2-xxxDCU-P	250	500	750
Weight	pounds .134	.157	-
	grams 61	71	-
DIN 43880 Dimension	1 TE / .70" [18 mm]		
Packaging Dimensions (HxWxL)	3.2 x 4.5 x 12" [83 x 116 x 305 mm]		
Standard Order Quantity	24 Units		