


START Waterproof Tubular 1200 IP66 4200lm 840 PC


Item No: 0047155

SYLVANIA

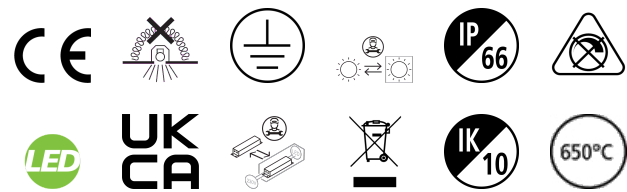


Technical Assets

Dimensions (mm)

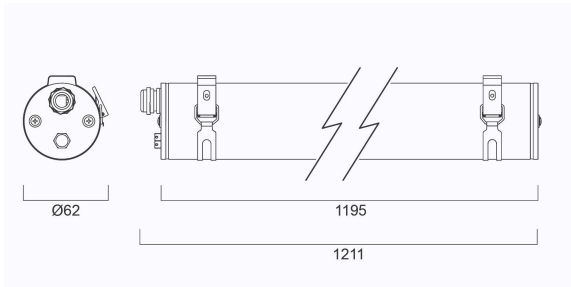

Photometrics



General data

Product name	START Waterproof Tubular 1200 IP66 4200lm 840 PC
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate, Polyester
General application	Logistics & Industry
Operating temperature range (°C)	-25°C...+50°C
ETIM Class	EC000109
E-number FI	4357126
Warranty	5 years

Optical data

Fixture luminous flux (lm)	4200
Luminaire efficacy (lm/W)	120
Correlated colour temperature (k)	4000
Light colour	Cool White
CRI (Ra)	80
Beam Angle (°)	120
Photobiological Risk Group	RG1

START Waterproof Tubular 1200 IP66 4200lm 840 PC

Item No: 0047155



Electrical data

Total power consumption (W)	35
Primary Supply/Product voltage - min (V)	220
Lamp power factor	0.9
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Dimming method	N/A
Drive current (mA)	350
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	19
Max. products per 13A C Breaker	26
Max. products per 16A C Breaker	31
Max. products per 20A C Breaker	39
Max. products per 20A B Breaker	23
Connectable conductor cross section - Max (mm²)	1.5

Lifetime data

Lifespan L70 B50	68000
Lifespan L80 B50	50000
Lifespan L80 B20	42800

Physical data

Housing colour	White
IP rating	IP66
IK rating	IK10
Nominal Product Length (mm)	1190
Nominal Product Diameter (mm)	62
Weight (kg)	1.24

Packaging

Product EAN number	5410288471556
Packaging single width (cm)	7.4
Packaging single depth (cm)	7.4
DUN14 (inner)	15410288471553
Packaging outer length / height (cm)	128.5

Safety data

Glow Wire Test (°C)	650
Optimal operating condition (°C)	-25-50