


START Waterproof Tubular
START Waterproof Tubular 1200 IP66 4200lm 840 PC
0047155



Product features

- START Waterproof Tubular is an aesthetically attractive integrated LED fixture. Easy to install with 304 stainless steel fixing brackets for ceiling mounting. Polycarbonate housing; 4000K; 35W; 4200lm; 120lm/W and lumen maintenance L870:B50 of 68,000 hours lifetime. IP66; IK10; Class I; 1190mm x 62mm. Can be suspended with additional accessory (SKU 0046035).

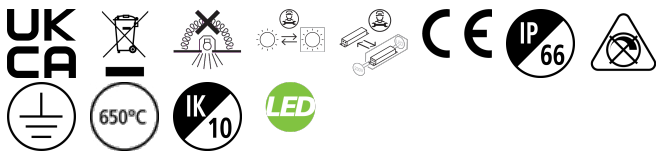

PRODUCT OVERVIEW


Product name	START Waterproof Tubular 1200 IP66 4200lm 840 PC
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate, Polyester
General application	Logistics & Industry
ETIM Class	EC000109
E-number FI	4357126
Warranty	5 years
Fixture luminous flux (lm)	4200
Luminaire efficacy (lm/W)	120
Correlated colour temperature (k)	4000
Light colour	Cool White
CRI (Ra)	80
Beam Angle (°)	120
Photobiological Risk Group	RG1
Total power consumption (W)	35
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
Housing colour	White
IP rating	IP66
IK rating	IK10
Product EAN number	5410288471556

PHOTOMETRY

START Waterproof Tubular

START Waterproof Tubular 1200 IP66 4200lm 840 PC

0047155



TECHNICAL DRAWINGS

